US ERA ARCHIVE DOCUMENT





UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

REGION IX 75 Hawthorne Street San Francisco, CA 94105-3901

MAR 2 4 2009

Via Overnight Delivery In Reply Refer To: CWA-309(a)-09-014

Mr. Fred Anawati President Mansco, Ltd. 91-607 Malakole Road Kapolei, Oahu, Hawaii 96707

Subject:

Issuance of Findings of Violation and Order for Compliance for NPDES Permit

Violations.

Dear Mr. Anawati:

On December 9, 2008, under the authority of the Clean Water Act (CWA), an EPAauthorized inspector and a representative of the Hawaii Department of Health (DOH) conducted a compliance inspection of Marisco Ltd's (Marisco's) Lil' Perris drydock and main facilities to determine Marisco's compliance with NPDES Permit No. HI0021786 and the CWA.

The inspection revealed violations at both facilities. Given the number and nature of violations at issue and EPAs prior enforcement actions against Marisco, an Order for Compliance is needed to ensure that Marisco promptly and fully complies with all applicable NPDES permit requirements.

Therefore, enclosed please find our Findings of Violation and an Order for Compliance pursuant to Sections 308(a) and 309(a)(3), (a)(4), and (a)(5)(A) of the CWA, as amended [33 U.S.C. Sections 1318(a), and 1319(a)(3), (a)(4), (a)(5)(A)) for Marisco's violations of NPDES permit conditions and the CWA at its Kapolei drydock and vessel repair operations.

The table below summarizes some of the key activities and due dates included in the Order:

KEY DATES	ADMINISTRATIVE ORDER CWA-309(a)-09-014		
IMMEDIATELY	Cease all unpermitted discharges. Fully implement and comply with the January BMP Plan and SWPPP Make corrections to certain violations identified in the inspection report.		
04/15/09	Complete additional corrections to other violations identified in the inspection report. Provide training to all employees, contractors and subcontractors performing work onsite.		
04/30/09	Submit interim compliance reports Submit revised Main Facility Revised SWPPP		
06/01/09	8. Submit certain other information		

The enclosed Order and the findings that constitute the basis behind the Order are issued pursuant to Sections 308(a) and 309(a)(3), (a)(4) and (a)(5)(A) of the Clean Water Act ("the Act") as amended [33 U.S.C. Sections 1318(a) and 1319(a)(3), (a)(4) and (a)(5)(A)]. Any violation of the terms of this Order or discharge standards could subject Marisco to a civil action for appropriate relief pursuant to Section 309(b) of the Act [33 U.S.C. Section 1319(b)] and/or penalties under Section 309(d) of the Act [33 U.S.C. Section 1319(d)] of up to \$31,500 per day of violation. In addition, under Section 309(g) of the Act [33 U.S.C. Section 1319(g)], any violation of the discharge standards could also subject Marisco to an administrative penalty action of up to \$16,000 per day of violation not to exceed \$177,500. Sections 309(c)(1), (e)(2) and (e)(4) of the Act [33 U.S.C. Section 1319(c)(1), (e)(2) and (e)(4)] also provide criminal penalties for negligent violations, knowing violations and knowingly making false statements

The request for information included in this Order is not subject to review by the Office of Management and Budget (OMB) under the Paperwork Reduction Act because it is not an "information collection request" within the meaning of 44 U.S.C. Sections 3502(4), 3502(11), 3507, 3512, and 3518. Furthermore, it is exempt from OMB review under the Paperwork Reduction Act because it is directed to fewer than ten persons [44 U.S.C. Section 3502(4), 3502(11) and 5 CFR Section 1320.5(a)].

EPA has promulgated regulations to protect the confidentiality of the business information it receives. These regulations are set forth in 40 CFR Part 2, Subpart B and in the Federal Register at 41 F.R. 36902 (September 1, 1976) and 43 F.R. 40000 (September 8, 1978). A claim of business confidentiality may be asserted in the manner specified by 40 CFR Section 2.203(b) for part or all of the information requested. EPA will disclose business information covered by such a claim only as authorized under 40 CFR Part 2, Subpart B. If no claim accompanies the business information at the time EPA receives it, EPA may make it available to the public without further notice. Marisco may not withhold from EPA any information on the grounds that it is confidential. Mr. Food Amswatti Marison, Ltd. CWA-309(a)-09-03-6 Page 1 of 3

If you have any questions, please contact Mr. Jeremy Johnstone of my staff at 415-972-3499 or at johnstone jeremy@epa.gov.

Sincerely,

Alexis Strauss

Director, Water Division

Enclosure

ce (w/enclosures): Alec Wong, DOH

	,

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY REGION 9

In the Matter of	1	
Marisco, Ltd. 91-607 Malekole Road	1	FINDINGS OF VIOLATION
Kapolei, Hawaii	1	AND
Proceedings under Section 308(a) and 309(a)(3),)	ORDER FOR COMPLAINCE
(a)(4) and (a)(5)(A) of the Clean Water Act, as amended, 33 U.S.C. Section 1318(a) and)	Docket No. CWA-309(a)-09-014
1319(a)(3), (a)(4) and (a)(5)(A)	1	

STATUTORY AUTHORITY

The following Findings of Violation and Order is issued under the authority vested in the Administrator of the U.S. Environmental Protection Agency (EPA) pursuant to Sections 308(a) and 309(a)(3), (a)(4) and (a)(5)(A) of the Clean Water Act [33 U.S.C. Sections (318(a) and 1319(a)(3), (a)(4) and (a)(5)(A)] (hereinafter the Act). This authority has been delegated by the Administrator and the Regional Administrator of EPA Region 9 to the Director of the Water Division of EPA Region 9.

FINDINGS OF VIOLATION

The Director of the Water Division of EPA Region 9 finds that Marisco, Ltd. ("Marisco"), violated NPDES Permit No. H10021786 and Sections 301(a) and 308 of the Act [33 U.S.C. Section 1311(a) and 1318]. This Finding is made on the basis of the following facts:

Background

 Section 301(a) of the Act [33 U.S.C. Section 1311(a)] prohibits the discharge of any pollutant by any person from a point source into waters of the United States except in

- compliance with, inter alia, a National Pollutant Discharge Elimination System (NPDES)

 permit issued in accordance with Section 402(a) of the Act [33 U.S.C. Section 1342].
- Section 502(5) of the Act [33 U.S.C. Section 1362(5)] defines "person" to mean an
 individual, corporation, partnership, association, State, municipality, commission, or
 political subdivision of a State, or any interstate body.
- 3. Section 502(6) of the Act [33 U.S.C. Section 1362(6)] defines "pollutant" to mean sewage, garbage, sewage sludge, rock, sand, chemical wastes, biological materials, dredged spoil, solid waste, incinerator residue, munitions, radioactive materials, heat, wrecked or discarded equipment, cellar dirt, and industrial, municipal, and agricultural waste discharged into water.
- Section 502(12) of the Act [33 U.S.C. Section 1362(12)] defines the term "discharge of pollutants" to mean any addition of any pollutant to navigable waters from any point source.
- 5 Section 502(7) of the Act [33 U.S.C. Section 1362(7)] defines the term "navigable waters" to mean the waters of the United States, including the territorial seas.
- Section 502(14) of the Act [33 U.S.C. Section 1362(14)] defines "point source" to mean any discernible, confined and discrete conveyance, including but not limited to any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, or vessel, or other floating craft, from which pollutants are or may be discharged.
- Section 402(p) of the Act [33 U.S.C. § 1342(p)] sets out specific requirements for the issuance of NPDES permits for the discharge of storm water. Section 402(p)(2)(B)

- requires permits to be issued for discharges of storm water associated with industrial activities [33 U.S.C. § 1342(p)(2)(B)].
- On 16 November 1990, EPA promulgated regulations at 40 C.F.R. Part 122 26. implementing Section 308 and the storm water permit provisions of Section 402(p) of the Act [33 U.S.C. § 1342(p)]
- 40 C.F.R. §122.26(c) provides that dischargers of storm water associated with industrial activity are required to apply for an individual permit, apply for a permit through a group application, or seek coverage under a promulgated storm water general permit. 40 C.F.R. §122,21(a) Duty to apply requires that any person who discharges or intends to discharge poljutants must apply for an NPDES permit unless exempt.
- 40 C.F.R. §122.26(b)(14) sets out the definition of "storm water discharge associated 10. with industrial activities" and, at 40 C.F.R. §122.26(b)(14)(ii) includes Ship Building and Repair establishments, SIC 3731.
- Section 402(b) of the Act [33 U.S.C. Section 1342(b)] authorizes states to administer the 11. NPDES program, with approval of the Administrator of EPA. The State of Hawaii, through its Department of Health (DOH), is a state approved under section 402(b) of the Act to administer the NPDES program, including the issuance of storm water permits.
- On October 25, 2002, DOH adopted, among other things, the NPDES General Permit 12. Authorizing Discharges of Storm Water Associated with Industrial Activities, HAR Chapter 11-55 Appendix B (the Hawan Industrial Activities General Permit). This general permit became effective on November 7, 2002. It expired on October 21, 2007, when the Hawaii Industrial Activities General Permit was subsequently readopted by

DOH with an effective date of October 22, 2007. The current general permit is set to expire on October 21, 2012.

Marisco

- Marisco is a company registered to do business in the State of Hawaii, and is therefore a person within the meaning of Section 502(5) of the Act [33 U.S.C. Section 1362(5)], and thus subject to the provisions of the Act, [33 U.S.C. Section 1251 et seq].
- Marisco is the owner and operator of 1) a ship repair facility located at Pier 3 of Kalaeloa

 Barbers Point Harbor on the Island of Oahu (the Main Facility) and 2) a drydock and an

 associated onshore support facility at the north east portion of Kalaeloa Barbers Point

 Harbor west of and across from Pier 7 (the "Lil" Perris" drydock facility).
- 15. Marisco discharges stormwater and industrial wastewater from each of these facilities to Kalaeloa Barbers Point Harbor. The stormwater and industrial wastewater discharges contain, among other things, copper, zinc, and suspended solids, all of which are pollutants as defined at Section 502(6) of the Act [33 U.S.C. Section 1362(6)], and the regulations at 40 C.F.R. §122.2.
- The two Marisco facilities are each "point sources" as defined by Section 502(14) of the Act [33 U.S.C. Section 1362(14)], and the regulations at 40 C.F.R. §122.2.
- 17. The two Marisco facilities are each categorized under Standard Industrial Classification (SIC) 3731, Ship Building and Repairing. As such they are also each engaged in "industrial activities" as defined at 40 C.F.R. §122.26(b)(14)(ii).
- Kalacioa Barbers Point Harbor is a "navigable water" as defined at Section 502(7) of the

- Act [33 U.S.C. Section 1362(7)], and a "water of the United States" as defined at the regulations at 40 C.F.R. §122.2
- 19. DOH has established water quality standards for the waters of Kalaeloa Barbers Point Harbor, Hawaii Administrative Rules ("HAR") Chapter 11-54. These standards include those established for Copper (Total Recoverable) and Zinc (Total Recoverable), in the amounts of 2.9 micrograms per liter ("ug/l") and 95 ug/l, respectively. HAR § 11-54-4(b)(3).

Marisco's Lil Perris Drydock Facility and Onshore Support Area

- 20. On February 9, 2007 DOH issued NPDES Permit No. HI 0021786 ("Permit") to Respondent, effective March 11, 2007 and set to expire on March 31, 2009. The Permit authorizes 1) the discharge of harbor water flowing from the Drydock Lift Perris during a lowering and lifting cycle and 2) storm water runoff from both the drydock and its onshore support area, in compliance with effluent limitations, monitoring requirements, and other conditions and requirements stated in the permit and in the attached DOH "Standard NPDES Permit Conditions," dated December 30, 2005. The Permit further established, among other things, the following requirements:
 - a. Part A.1.a establishes effluent limitations and monitoring requirements for harbor water flowing off of the drydock during each lowering and lifting cycle through Outfall Serial Nos. 001 and 002. A listing of select effluent limitations and monitoring requirements are attached at Exhibit 1, which is hereby made a part of these Findings of Violation and Order;
 - Part A.2:a establishes effluent limitations and monitoring requirements for storm.

- water runoff associated with industrial activity through Outfall Serial Nos. 003 and 004;
- Part A.4 requires the Discharger to use test methods promulgated in 40 C.F.R.
 Part 136;
- Parts B.2.a through B.2.i establish pollution prevention measures required to be implemented by the Discharger.
- Part B.4.a requires the Discharger to maintain monthly logs of all dry dock cycling activities;
- f. Part B.4.b requires the Discharger to maintain daily logs documenting all the sand blasting activities conducted at the Facility and submit a summary of each month's logs with the monthly monitoring reports;
- g. Part B.4.e of NPDES Permit No. HI0021786 requires the Discharger to maintain on-site rain gage records and submit a summary of the logs with the monthly monitoring reports;
- Part B.5 requires the Discharger to develop and implement a Best Management Practices (BMP) Plan to reduce pollutants discharged from the Facility, and update the BMP Plan as needed;
- Part B.5.a of NPDES Permit No. H10021786 requires the Discharger to review
 and update the BMPs Plan as needed when changes are made at the Facility,
 within 30-days from the date that such changes were made. Further, the
 Discharger must maintain documentation of all changes made to the plan;

- j. Part C. I.d of NPDES Permit No HI0021786 requires the Discharger to submit monitoring reports (or have them postmarked), no later than the 28th day of the month following the completed reporting period, to the EPA and DOH; and
- k. Standard Provision 3.c requires the Discharger to periodically calibrate all monitoring and analytical equipment in order to ensure the accuracy of measurements at 6 month intervals or the manufacturer's recommended intervals.
- Standard Provision 14 b requires the Discharger to retain all monitoring information, including all calibration and maintenance records, for a minimum of five (5) years, from the date of the sample, measurement or report.
- Required self-monitoring reports for January through November 2008 were not submitted to DOH until January 29, 2009, in violation of Part C.1.d of the permit.
 - Required self-monitoring reports for January through November 2008 were not submitted to EPA in violation of Part C.1.d of the permit.
 - 23. Required self-monitoring reports submitted to DOH by the respondent pursuant to the permit demonstrate that, at least since March 2007 (the effective date of the permit) Marisco has exceeded its established effluent limitations for both copper and zinc on numerous occasions. A listing of these reported exceedances are attached at Exhibit 1, which is hereby included as part of these Findings.
 - On December 9, 2008 an EPA contractor and a DOH inspector together inspected the Lil*
 Perris drydock facility for compliance with the terms and conditions of NPDES Permit

No. HI0021786. A copy of the report of that inspection (Inspection report) is attached as Exhibit 2 and included herein by reference. Among other things, the inspection report demonstrates:

- Marisco violated Part A.2.a and Standard Provision 14.b of the permit in that the Facility representative (the Health, Safety, and EPA Compliance Officer) was unable to provide a recent storm water monitoring report;
- b. Marisco violated Part A.4 and Standard Provision 14 b of the permit in that the Facility representative reported that all effluent samples for the harbor water running off the dry dock are taken using a plastic scoop and a plastic bucket, prior to distributing the effluent into the appropriate sample containers issued by the contract laboratory. 40 C.F.R. Part 136 requires that all samples for oil and grease be taken directly into a glass container. The monitoring method described by the Facility representative for sampling oil and grease does not meet the requirements of 40 C.F.R. Part 136 or therefore, Part A.4 of the permit;
- Marisco violated Part B.4.b and Standard Provision 14.b of the permit in that the Facility representative was unable to provide a log documenting sand blasting activities at the Facility;
- d. Marisco violated Part B.4.c and Standard Provision 14.b of the permit in that the Facility representative was unable to provide records of rainfall at the Facility, nor was a rain gage available for observation on the date of the inspection;

- Marisco violated Part B 5.a of the permit in that the most recent BMP Plan available for review on the date of the inspection was last revised in October 2002. The BMP Plan did not appear to have been updated during the term of the current permit and did not accurately reflect current Facility site conditions;
- f. Marisco violated Standard Condition 3.c in that the pH buffer (4.0) available onsite to conduct the calibrations of the pH meter had an expiration date of October 2004;
- g. Marisco violated Standard Condition 14.b in that:
 - Calibration records for the pH meter used by the Discharger to demonstrate compliance with the effluent limitations contained in the NPDES Permit were not available for review;
 - ii. It was observed in the dry dock cycling log that a cycling event occurred on August 22, 2008. Part.A.1, a requires Marisco to conduct monitoring during each dry dock cycle. Marisco's dock cycling log indicates that monitoring occurred at the time of the cycling, however a copy of the analytical data for this monitoring event was not available for review on the date of the inspection; and
 - a chain-of-custody for a reported June 2, 2008 monitoring event was not available for review on the date of the inspection.
- Marisco violated B 2 and B.5.a in that the following conditions observed during:

the inspection at the dry dock and shore side of the dry dock, were not in compliance with the proper implementation of BMPs as specified in either Part B of permit and/or the Discharger's BMP Plan (dated October 2002):

- Two 55-gallon drums of used oil were observed stored without secondary containment on the shore side staging area beside the dry dock, inconsistent with Pari B.2.j of the permit which states, "The Permittee shall maintain land-based operations in a clean and orderly manner and implement measures to prevent pollutants from contacting storm water runoff." Further, this condition is not consistent with land-based operation BMPs of the Discharger's BMP Plun (p. 8), which states that spill pallets will be on-site and used;
- A mixture of oil and condensate was observed dripping directly on the ground from an air compressor on the shore side staging area beside the dry dock, inconsistent with Part B.2.j of the permit;
- iii. Sand blasting grit was observed spilled on the ground, shore side of the dry dock and multiple bags of fresh sand blasting grit were observed stored on-site without cover, inconsistent with Part B.2.j of the permit and with the land-based operation BMPs of the Marisco[†]s BMP Plan, which states that sand blast grit [new or spent] will be covered; and
- iv. The dry dock does not have any structural BMPs, such as berming, to contain potential discharges from washing/cleaning activities, inconsistent

with Marisco's BMP Plan. That Plan states (pp. 4 and 5) that, under low pressure/low volume cleaning and under ultra-high pressure water blasting, a 4" inch berm is on the forward and aft ends of the dry dock to contain any liquids generated on-site. The Facility representative indicated that the a former 4" berm was removed and further stated that temporary berms or containment BMPs are not set up on the dry dock.

- 25. EPA's NPDES regulations provide, at 40 C.F.R. §122.6(a), that an expiring EPA-issued NPDES permit may be administratively continued pending permit reissuance only if a complete and timely application for renewal of an expiring NPDES permit is made and, through no fault of the permittee, the new permit does not issue before the expiration date. In an NPDES-authorized State, an expiring NPDES permit may be continued if state law allows [40 C.F.R. §122.6(d)]. In Hawaii, State law [Hawaii Administrative Rules Section 11-55-27(a)] specifies that in order to receive such a continuation, an application for renewal of an expiring NPDES permit must be made at least one hundred eighty (180) days prior to the permit's expiration.
- 26. In order to have made a timely application for renewal of its expiring NPDES permit and to be eligible for a continuation of that permit, Marisco was to have submitted its complete application by October 2, 2008. Marisco submitted the application for renewal of the NPDES late, on January 29, 2009. Therefore, NPDES Permit No. HI0021780 therefore will not be administratively continued pending reissuance.
- 27. Marisco's permit renewal application included, among other things, a document entitled "Environmental Best Management Practices" for the Lil! Perris Facility. Revised January

- 2009" (Lif' Perris Revised BMP Plan).
- Upon expiration of the permit on March 31, 2009 and until such time that DOH re-issues 28. Marisco a valid NPDES permit authorizing 1) the discharge of harbor water flowing from the Drydock Lil' Perris during a lowering and lifting cycle and 2) the discharge of storm water runoff from the drydock and adjacent land area, Marisco will be discharging without a valid permit each time it eyeles the drydock and with every rain event that produces stormwater discharge into Kalaeloa Barbers Point Harbor

Marisco's Main Facility

- 29 DOH previously issued NPDES Permit No. H10021199 authorizing certain discharges from Marisco's Main Facility. This permit was last issued on March 10, 2000, effective on April 10, 2000, and it expired on March 31, 2004. On March 16, 2004 the permit will administratively continued pending permit reissuance. The permit was terminated by DOH on March 31, 2006.
- On March 24, 2006 Marisco filed for coverage under the Hawaii Industrial Activities General Pennit by submitting a complete Notice of Intent. DOH provided Marisco with a Notice of General Permit Coverage (NGPC) on March 31, 2006 and assigned ID No. HIR20C504 to Mansco for its Main Facility.
- NGPC No. HIR20C504 expired on October 22, 2007. Despite receiving notice from 31. DOH regarding procedures for reapplication, Mariaco did not reapply for coverage
- The 2002 BMP plan for NPDES H10021786 does not extend to, include, or apply to 32. Marisco's Main Facility.
- Rainfall events in the amount of 0.1 inches or more are able to produce stormwater runo)? 33.



from Marisco's Main Facility. Rain data available from the National Weather Service's weather station at Campbell Industrial Park, located in close proximity to Marisco's Main Facility, indicates that it rained in the amount of 0.1 inches or more on at least 31 occasions between October 23, 2007 and December 31, 2008. A table summarizing this data is attached as Exhibit 3. Discharges of stormwater from Marisco's Main Facility since October 23, 2007 were made without authorization under the CWA.

- 34 On January 29, 2009 Marisco submitted to DOH an application for renewal of NPDES Permit No. HI0021786. Marisco's permit renewal application included, among other things, a "Storm Water Pollution Prevention Plan, Marisco Main Facility, Revised January 2009" (Main Facility Revised SWPPP). Marisco requested that stormwater discharges from the Main facility be permitted under the subject individual NPDES permit rather than, as previously under, the Hawaii Industrial Activities General Permit.
- 35. The December 9, 2008 compliance inspection by EPA's contract and DOH inspectors included a review of practices and conditions at Marisco's Main Facility. Among other things, the inspectors observed the following conditions which indicate the potential for contaminated, unpermitted discharges:
 - Berms around the main yard, a portion of Marisco's Main Facility referred to as "JR's area", and the storage area behind the main yard were observed to have breaches, discharge structures, or areas that lacked containment, resulting in potential storm water discharge locations;

- Due to the lack of sufficient berming, and the potential for storm water discharges, several areas were noted that require secondary containment or overhead coverage;
- the storage area behind (northeast of) the metal working building. The inspectors noted that concrete had not been properly contained, including in some cases overflowing into the receiving water;
- d. Two workers were observed mixing coment on the work barge. Wet cement was observed on the ground of the work barge. Runoff from the cement mixing was observed running under the wall and down the side of the work barge into the receiving water;
- e. A sink was observed on the stem of the work barge. The Facility representative stated that the sink was used for washing hands and cleaning fish and that he believed that the sink discharges directly into the harbor below; and
- f. A worker was observed hosing down the northwest work area of the Facility and the associated washwater was observed discharging offsite into receiving waters.

Conclusion

36. Based upon the foregoing, I find that Marisco has violated NPDES No. H10012786 and Sections 301(a) and 308 of the Act.

ADMINISTRATIVE ORDER

Taking the above Findings into consideration and considering the potential environmental and human health effects of the violations and all good faith efforts to comply, EPA has determined that compliance in accordance with the following requirements is reasonable. Pursuant to Section 308(a) and 309(a)(3), (a)(4) and (a)(5)(A) of the Act, 33 U.S.C. Section 1318(a) and 1319(a)(3), (a)(4) and (a)(5)(A), IT IS HEREBY ORDERED that Marisco comply with the following requirements:

Lil' Perris Drydock and onshore support area

- EFFECTIVE IMMEDIATELY, Marisco shall henceforth fully implement the Sandblast
 Grit Tracking Program, Revised January 2009, included as Appendix C to the Lil* Perris
 Revised BMP Plan.
- EFFECTIVE IMMEDIATELY, Marisco shall install a rain gauge, record onsite
 precipitation amounts on a daily basis, and report a summary of the logs with monthly
 DMRs.
- EFFECTIVE IMMEDIATELY, Marisco shall henceforth collect all samples to be analyzed for Oil and Grease pursuant to Part A.1 a of the permit directly in clean glass containers, without transfer into any secondary container.
- 4. EFFECTIVE IMMEDIATELY, Marisco shall henceforth properly calibrate its pH meter immediately prior to each compliance sampling to include analysis for pH, and shall maintain records of all such pH meter calibration events.
- Commencing on APRIL 1, 2009 Marisco shall fully comply with all terms and conditions
 of expiring NPDES Permit No. HI0021786 until such time that a reasoned permit, or new

permit, goes into effect. Additionally, Marisco shall also comply with the following

- Except as noted below, immediately and fully comply with the Lil' Perris Revisest
 BMP Plan.
- b. Prior to working on any vessel install the permanent berm referenced at BMP 2. "Low-Pressure Wash Water"
- c. Marisco shall promptly make any changes to the Lil' Perris Revised BMP Plan requested by either EPA or DOH, and shall promptly implement any such changes.
- By APRIL 15, 2009 Marisco shall correct all of the BMP deficiencies described at Major Finding 13 of the inspection report.
- 7. By APRIL 15, 2009 Marisco shall repair all berms, curbs and dikes at its onshore support area such that there can be no uncontrolled discharges from this area to Kalaeloa Barbers Point Harbor.
- 8. By APRIL 15, 2009 provide training on the Lil' Perris Revised BMP Plan to all employees and contractors, subcontractors performing work at the Lil' Perris Drydock and onshore support area. Provide training to any new employees, contractors, subcontractors prior to their performing any other work activities.
- By APRIL 30, 2009, Marisco shall submit a report describing both the activities taken pursuant to and certifying compliance with Items 1-8 immediately above.
- Marisco is prohibited from performing pressure washing at greater than 4000 psi unleand until a BMP for this activity is submitted to and approved by DOH.

Main Facility

- 11 EFFECTIVE IMMEDIATELY Marisco shall cease all discharges except for uncontaminated stormwater runoff.
- 12 Except as noted below, Marisco shall IMMEDIATELY and fully comply with the Main Facility Revised SWPPP.
- VITHIN 24 HOURS OF RECEIPT OF THIS ORDER Manisco shall photograph the valving installed to control discharges from the valved openings in the berms at potential outfalls 001 and 002 as described at Section 4 of the Main Facility Revised SWPPP.
- 14 By APRIL 15, 2009 Marisco shall submit copies of the photographs taken pursuant to ltem 13 immediately above, along with documentation as to date and time that the photographs were taken.
- By APRIL 15, 2009 Marisco shall properly clean the deck of the support work trarge of rust chips/dust that has a potential to discharge into Kalaeloa Barbers Point Harbor, as noted in the Inspection report, photo 40.
- By APRIL 15, 2009 Marisco shall correct all of the deficiencies described at Major
 Finding 14 of the inspection report.
- By APRIL 15, 2009 Marisco shall remove from the Facility, and properly dispose of, all waste paints, waste solvents, waste petroleum products, other fiquid wastes, surplus metals and equipment.
- By APRIL 15, 2009 Marisco shall develop and implement BMPs for areas of activity on the support work barge that are not wholly under impervious cover.
- By APRIL 15, 2009 Marisco shall provide training on the Main Facility Revised SWPPP

- to all employees and contractors, subcontractors performing work at the Main Facility.

 Marisco shall additionally provide training to any new employees, contractors, and subcontractors prior to their performing any work activities.
- By APRIL 30, 2009, Marisco shall submit a report describing both the activities taken pursuant to and certifying compliance with Items 11-19 immediately above.
- 21. By APRIL 30, 2009 Marisco shall submit a revised Main Facility Revised SWPPP that.

 includes a description of pollutant sources, activities, and BMPs for uncovered areas of the work barge;
 correctly describes all locations of potential stormwater discharge (i.e. outfalls) and correctly identifies each of these on the document's attached "Site Drainage Plan and Outfalls" diagram; and 3) includes a plan for stormwater sampling at each applicable discharge location. Marisco shall promptly make any changes to the Main Facility Revised SWPPP requested by either EPA or DOH, and shall promptly implement any such changes.

Submission of Information

- 22. By IUNE 1, 2009 Marisco shall provide the following information:
 - a. Copies of any/all Chain of Custody forms completed for and analytical reports received from Marisco's contract laboratory for sampling of harbor water discharge associated with drydock cycling January 1, 2005 through March 31, 2009 under either NPDES Permit No. H10021786 or H10021199;
 - b. Copies of any/all Chain of Custody forms completed for and analytical reports received from Marisco's contract laboratory for ambient sampling conducted from January 1, 2005 through March 31, 2009 under either NPDES Permit No.

HI0021786 or HI0021199;

EPA ARCHIVE DOCUMENT

- Copies of any/all Chain of Custody forms completed for and analytical reports received from Marisco's contract laboratory for stormwater discharge sampling conducted from January 1, 2005 through March 31, 2009 under either NPDES Permit No. HI0021786 or FII0021199;
- Copies of anyall BMP plans or equivalent in effect from January 1, 2005 through March 31, 2009 for both the Main Facility and the Lil' Perris Drydock and its onshore support area;
- Copies of any/all laboratory reports from sampling of either low-pressure/lowvolume cleaning and/or ultra-high pressure water blasting performed at Lill Perrisfrom January 1, 2005 through March 31, 2009;
- Copies of any/all shipping/disposal manifests associated with the off-site f. shipment and ultimate disposal of either low-pressure/low-volume cleaning and/or ultra-high pressure water blasting performed at Lil' Perris from January 1, 2005 through March 31, 2009;
- A record of all dates from January 1, 2005 forward on which Marisco performed either low-pressure/low-volume cleaning and/or ultra-high pressure water blasting performed at Lil' Perris,
- Copies of any/all records of trainings under any of the BMP plans or equivalent in ħ. effect at the time, provided from January 1, 2005 through March 31, 2009 to Marisco employees, contractors, and/or subcontractors for both the Main Facility and the Lil' Perris Drydock and its onshore support area; and

- A listing of all employees of Marisco from January 1, 2005 forward. The submitted listing shall include each employee's full name, dates worked at Marisco, and job title(s) while employed at Marisco.
- For each Item 1-20 above, provide Mariseo's cost of compliance. The submitted cost information shall include for each Item:
 - i. Reference to the applicable Compliance Order Item No.
 - A description of the compliance action(s) taken;
 - tiii. The cost of implementing the compliance action(s), disaggregated by capital costs, non-depreciable one-time expenses, and unutually recurring costs (e.g. O&M). For each reported cost indicate if the amount is based upon actual expenditures or are derived from estimates.
- 23. All reports submitted pursuant to this Order must be signed by a principal executive officer, ranking elected official, or duly authorized representative of Marisco [as specified by 40 CFR § 122.22 (b)(2)] and shall include the following statement:

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquity of the person or persons who manage the system, or those persons directly responsible for gathering the information. I certify that the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

All submittals shall be mailed to the following addresses:

U.S. ENVIRONMENTAL PROTECTION AGENCY 75 Hawthorne Street San Francisco, California 94105 Attn: Jeremy Johnstone (WTR-7)

and

HAWAII DEPARTMENT OF HEALTH Clean Water Branch P.O. Box 3378 Honolulu, Hawaii 96801-3378 Attn: Mike Tsuji

- 25. This Order is not and shall not be interpreted to be an NPDES permit under Section 402 of the Act [33 U.S.C. Section 1342], nor shall it in any way relieve Mariaco of obligations imposed by the Act, or any other Federal, State or local law.
- 26. The State of Hawaii has been notified of this action.
- 27 This Order takes effect upon signature.

Alexis Strauss

Director, Water Division

24 March 200)

Dated

			4.	

Exhibit 1 Marisco, Ltd. NPDES Permit No. HI0021786 Drydock Cycling Effluent Limitation Violations April 2007 – November 2008

Date	Copper Limit = 2.9 ug/l Daily Max.	Zinc Limit = 95 ug/ Daily Max.
Apr 2007	43	210
May 2007	110	150
Jun 2007	÷.	100
Aug 2007	140	250
Jan 2008	450	310
Feb 2008	83	100
Apr 2008	590	410
May 2008	1300	510
Jun 2008	790	310
Aug 2008	630	390
Nov 2008	390	260

1			
			*
	,		

EPA Region IX and Hawaii Department of Health NPDES Compliance Evaluation Inspection (CEI) Report

Name and Location of Facility Inspected Mansco, LTD. 91-607 Malakole Road Kapolal, Hi 96/07	Entry Date 12/9/2009 Entry Time 9 00 AM	Permit Effective Date 3/11/2007
NPDES Permit Number		Permit Expiration Date 3/31/2009
Name(s) & Title(s) of On-Site Representative(s) Bill McCaffery (Health, Salety, and EPA Complaince Officer) Fred Anawati (President)	Contact Information Phone (808) 554-0730	Notified of Inspection? ☐ Yes ☑ No
Name, Title & Address of Responsible Official Fred Anawati (President)	Contact Information Phone: (808) 682-1333	Official Contacted? ⊠ Yes □ No
Inspector(s) Primary: Dan Connally (PG Environmental, I Other(s): Matt Kurano (HI DOH)	Presented Credentials? ⊠ Yes □ No	
Weather Conditions at the Time of the Inspection: Surmy; no recent precipitation		ater Name:
Prepared By Dan Connally (PG Environment Reviewed By: Scott Coulson (PG Environment		

On December 9, 2008, as part of a municipal separate storm sewer system (MS4) compliance audit of the Hawali Department of Transportation, Harbors Division, a USEPA contractor inspected Marisco, LTD, in Kapolei Hawali (in Barbers Point Deep Draft Harbor, located on Pier P-3, and across from Pier P-7). Discharges from Marisco, LTD, are regulated by NPDES Permit No. HI0021766. The primary purposes of the inspection were to (1) assess the adequacy, appropriateness, and maintenance of best management practices (BMPs) employed by Marisco, LTD (a Harbors Division tenant) and (2) determine the accuracy and reliability of the Marisco, LTD's self-monitoring and reporting program. The primary on-site representative was Bill McCaffery (Health, Safety, and EPA Compliance Officer). The weather at the time of inspection was sunny with no sign of recent precipitation.

Introduction

Marisco, LTD (Facility or Discharger) repairs and maintains ships at its Facility located in Barbers Point Harbor. The Facility conducts industrial activities throughout two portions of the shoreline around Barbers Point Harbor, including dockside at Pier P-3 and on a dry dock and storage area across from Pier P-7.

Facility Description

The Facility is separated into two main locations. The portion of the Facility located on Pier P-3 includes an office building, enclosed work areas (welding, sandblasting, pointing, pipe shop, and machine shop), materials storage areas, a main yard with heavy equipment, and a work barge (a barge on which materials are stored and is used by the Facility staff as a staging area for work on boats docked at the Facility). The area located across from Pier P-7 is where the dry dock, Lil Perris, is located. The dry dock portion of the Facility includes a storage/staging area and the dry dock itself.

Figure 1 provides an overview map of the Barbers Point Harbor and the two Murisco.

LTD operations

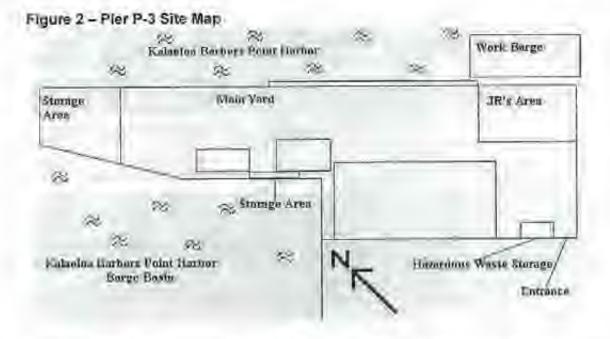


Figure 1 - Kalealoa Barbers Point Harbor

The Pier P-3 location can be separated into five main areas:

- o A storage area at the southeast side of the Facility (referred to as JR's area),
- A hazardous waste storage area (located just southwest of JR's area).
- A work barge (located just northeast to JR's area).
- The main yard,
- A storage area at the northwest side of the Facility, and
- o A smaller storage area behind (southwest) the office building.

Figure 2 is a diagram of the Pier P-3 location (not to scale).



Industrial activities conducted at the Pier P-3 location include, but are not limited to: material storage, sand biasting, sanding, paint removal, paint application, welding, metril grinding and other metal fabrication, mechanical work, electrical work, petroleum storage, and hazardous waste storage.

JR's area is a storage area directly adjacent to the harbor's edge. The edge of the storage along the harbor is bermed. One significant breach of the berm between the storage area and the receiving water was observed and appears to be a potential discharge point for storm water. In addition, the far southeast edge of the berm ends abruptly, appearing to allow storm water to discharge directly into the receiving water. Heavy equipment, spent blasting grit (uncovered), 55-gallon drums of petroleum products and paint wastes, and other miscellaneous materials were observed stored in this location. A large used oil tank was in the area, but was not in use.

The hazardous waste storage area is covered and provides secondary containment. Also located in the vicinity was a 3,000 gallon diesel storage tank, and two portable double walled diesel tanks. It appeared that various liquids (hazardous and non-hazardous) are temporarily stored in front of the hazardous waste containment area. It appeared that storm water from this area would either flow to the main yard where it would be captured in a dry well, or would commingle with storm water from JR's area and potentially be discharged to the receiving water.

The work barge is a barge docked at the Pier P-3 Facility that is used as a storage and staging area. The Facility representative stated that the work barge would be removed from service soon, but was unsure of an exact date. The Facility representative further stated that storage and staging operations on the work barge had been reduced and

would continue to be minimized. During the inspection, the barge was being used for the storage of various materials (wood, metal, paints, 55-gallon drums of petroleum products, wire, rope, hoses, and other), and a staging area (cement was being mixed on the barge). An ice machine and sink are also located on the barge. Storm water controls or BMPs on the work barge were not observed during the inspection. Storm water would flow directly off the edge of the barge.

The main yard at the Pier P-3 Facility borders the harbor and the office buildings and enclosed work areas. The main yard is primarily used as a storage area and staging area for work going on throughout the Facility. Materials and equipment were observed stored on both sides of the main yard. Heavy equipment, including a large crane was also located on-site. It appeared that the main yard was graded so that most of the storm water from the center was directed into three dry wells, located in the center of the main yard. The Facility representative was not certain of the total capacity of the dry wells. The grading of the perimeter of the main yard was unclear to the inspector. The perimeter of the main yard was bermed, however multiple potential discharge locations through the berm were identified during the inspection. Evidence of runoff from the main yard through portions of the berm was also observed during the inspection.

The small storage area behind the office building and enclosed work areas was observed with pallets of paint, used zinc anodes, and 55-gallon drums. The small storage area was bermed, however a drain had been constructed to discharge runoff from the area directly into the receiving water. Two dogs were observed kenneled in this drainage location.

The area located across from Pier P-7 is where the dry dock, Lil Perris, is located. This location can be broken into two parts, the shore side portion that is adjacent to the dry dock, and the dry dock itself. Discharges from this location are clearly identified and regulated under NPDES Permit No. Hi0021786.

Figure 3 is a diagram of the area located across from Pier P-7 (not to scale)




Figure 3 - Site Map (Lil' Perris Dry Dock)

The shore side area is used as a storage area and staging area for work on the Lill Perris dry dock. Materials, objects, and equipment observed stored in this location included a portable tollet, used tires, 55-gallon drums, air compressors, cranes, scrap metal, various large tanks, rope, and chains. The area had a berm that was constructed out of cement pillars, plastic, and dirt. The berm had eroded and multiple potential discharge locations were observed down the entire length of the location.

The dry dock, Lil' Perris, has a certified capacity of 3,500 metric tons. Activities conducted on the dry dock include, but are not limited to; sandblasting, pressure washing, sanding, paint removal, paint application, welding, metal grinding and other metal fabrication, mechanical work, and electrical work. The two open ends of the dry dock had tarps drawn across them to minimize air blown particulates from reaching the receiving water. Structural BMPs, such as a berm, are not utilized on the dry dock.

Permitted Discharges

The portion of the Facility located on Pier P-3 is not addressed under NPDES Permit No. Hi0021786. Further, the Facility does not have coverage under the Hawaii general industrial storm water permit or any other NPDES permit.

On March 31, 2006 the Discharger received authorization from DOH to discharge storm water from the Facility located on Pier P-3, under Chapter 11-55. Appendix B, NPDES General Permit Authorizing Discharges of Storm Water Associated with Industrial Activities. The general storm water permit expired at midnight on October 22, 2007. On January 11, 2008 DOH sent a letter informing the Discharger of the expiration and requested the Discharger submit a Notice of Intent or Notice of Cessation for the general permit renewal. The Discharger did not respond with a Notice or Intent or Notice of Cessation. On October 23, 2008 DOH again notified the Discharger that coverage under the general storm water permit had expired and that the DOH was assuming that the Discharger no longer required coverage under the general storm water permit. DOH further states in it's October 23, 2008 letter that non-permitted discharges to State Waters are violations of the Hawaii Water Pollution rules and regulations and the responsible parties may face pivil and/or criminal prosecution of up to \$25,000 per day for each violation.

The individual permit (NPDES No. Hi0021786) addresses the portion of the Facility located across from Pier P-7. Authorized discharges under the permit include, the discharge of harbor water off the dry dock from Outfall Senai Nos. 001 and 002, and storm water runoff from the dry dock and shore from Outfall Senai Nos. 003 and 004 Potential sources of pollutants that may be discharged during the dry dock cycling (the lowering and lifting of the dry dock) and in storm water runoff from the shoreline areas and dry dock include materials used or stored, and waste products generated during repair and maintenance activities.

In addition, the discharge of noncontact cooling water is permitted through Outfall Serial No. 005, however the Facility representative stated that noncontact cooling water is no longer discharged from the Facility. Cooling water from vessels are pumped to tanker trucks and taken off-site for treatment. Additional discharges or discharge locations are not permitted under NPDES Permit No. HI0021786.

Treatment is not provided for water that contacts the dry dock during cycling or storm water runoff from the shore side area. The Facility relies on the proper implementation of BMPs to meet the established water quality objectives and meet effluent limitations BMPs specified in Part B. section 2 the permit include.

 The Permittee shall provide appropriate and effective containment of sandblastignt during sandblasting activities to prevent the duri of gnt. The Permittee shall immediately cease sandblasting activities when sandblastignt is observed dritting outside of the containment. The Permittee may resume sandblasting activities when effective containment is established.

- The Permittee shall clean the dry dock deck and other areas of the Facility, at the end of each day work is performed. The Permittee shall vacuum clean sandblast grif and other fine debns.
- The Permittee shall immediately clean up any spills, including, but not limited to, oil and hydraulic fluid.
- The Permittee shall contain and store collected spent sandblast grit from san blasting operation under a cover.
- The Permittee shall maintain all dry dock surfaces, including the top of the wing walls, to prevent chipped paint, rust, and other debns from entering the receiving water.
- Prior to lowering, the Permittee shall clean the surface of the dry dock to remove solids and other pollutants. If vacuuming is not sufficient for cleaning hard-to-reacti areas, then the Permittee shall implement additional measures to ensure that solids are removed from these areas of the Best Available Technology (BAT) to prevent solids from contacting the dry dock.
- The Permittee shall discharge cooling water from the docked vessel directly to the
 receiving water in a manner that prevents the cooling water discharge from
 contacting the dry dock, docked vessel, or any other pollutant
- The Permittee shall properly store and dispose all wastes.
- The Permittee shall not discharge any wastewater or other pollutant into dry dock ballast tanks or any other dry dock compartment.
- The Permittee shall maintain land-based operations in a clean and orderly manner and implement measures to prevent pollutants from contacting storm water runoff.

In addition, Part B, section 5 requires the following:

- The Permittee shall develop and implement a BMPs [Best Management Practices]
 Plan to reduce pollutants discharged from the Facility
- The Permittee shall review and update the BMPs Plan as needed to comply with the permit.
- The Permittee shall train all appropriate and applicable employees to implement the BMPs Plan.
- The Permittee shall maintain the BMPs Plun on-site or at a nearby office.

Monitoring

The Discharger is required to conduct effluent (harbor water flowing off dry dock and noncontact cooling water), storm water, and ambient water monitoring as specified in Part A.1. A.2, and A.3 of NPDES Permit No. HI0021786.

Monitoring is conducted by the Facility's Heath, Safety, and EPA Compliance Officer. The analysis for pH and temperature is conducted on-site by Facility personnel. All additional analysis required under NPDES Permit No. HI0021786 are conducted by a contract laboratory, Inalab, Inc. (3615 Harding Ave., Suite 308, Honolulu, HI 96816).

The Facility representative stated that the contact harbor water flowing off the dry dock is sampled as a composite from multiple monitoring locations. Due to the topography of the harbor floor, the dry dock is not submerged evenly, but is lowered on one side more than the other. The southwestern end of the dry dock is submerged first during lowering activities, and the Facility representative pulls a sample from this area first, then as the dry dock is lowered more the Facility representative pulls additional aliquot samples as the harbor water moves further toward the northeast end of the dry dock. The Facility representative stated that the northeast end of the dry dock is never dropped below the water level, and no contact harbor water ever is discharged from the northeast side of the dry dock. Thus, only one of the two outfall locations (001) is reported as having a discharge. Prior to the lowering of each dry dock, the Discharger is required to photograph the dry dock surface to show the cleanliness of the dry dock surface. Ambient water monitoring is taken prior to any lowering and lifting activities.

When discharged, noncontact cooling water must be monitored monthly, downstream from any additions to the source water and prior to the cooling system, and downstream from the cooling system and prior to mixing with the receiving water. The date, starting time, ending time, duration, flow rate, and volume of each discharge of noncontact cooling water must be recorded.

Storm water runoff must be monitored annually. Grab samples must be taken within the first 15 minutes of a qualifying storm event, and composite samples composed of two aliquots, with the first one taken during the first 15 minutes, must be taken from qualifying storm events. A qualifying storm event is defined in the permit as a storm resulting in rainfall that accumulates more than 0.1 inches and occurs at least 72 hours after the previous measurable rainfall event.

The Facility representative (the Health, Safety, and EPA Compliance Officer) stated that he had never sampled a storm water discharge and was not aware of the exact shore side storm water discharge location. It should be noted that the Health, Safety, and EPA Compliance Officer stated that he had only been working in this capacity for the last 6 months.

The Facility representative stated that the DOH had requested that ambient receiving water data not be reported on the monitoring reports. This was confirmed by the Hawiiii Department of Health (DOH) representative on-site (co-inspector), thus the lack of ambient receiving water data in the monitoring reports is not addressed in this report.

Records and Reports

As part of the inspection, records, plans, reports, and documentation specifically required by the NPDES permit or Standard Provisions was viewed on-site. The on-site review was not a thorough review of each record, plan, or report, and it's inclusion in the following list as being reviewed does not indicate complete adequacy and acceptance by the permitting agency. The records review is conducted to identify issues with record keeping, verify proper monitoring and reporting practices, identify required reports that have not been completed as specified in the NPDES permit, identify recent effluent limitation exceedances, and identify any other major compliance issues that may become apparent through the on-site review. Records, plans, reports, and documentation requested on the date of the inspection include:

- · Copy of the current NPDES permit:
- Best Management Practices Plan
- Last 3 months of discharge monitoring reports (DMRs) with chain-of-custodies and analytical data;
- Spill Prevention, Control and Countermeasure (SPCC) Plan;
- Dry dock cycle log (visual observations and pictures);
- · Previous storm water report:
- pH calibration records;
- · Sand blasting log, and
- Rain gage records.

As discussed in the Major Findings portion of this report, not all the requested incuments were available for review on the date of the inspection.

The discharge monitoring report for December 2007 was reviewed as a component of this inspection. In addition, a review of draft monitoring reports for January 2008 through October 2008 were reviewed. The Discharger was required to have the monthly monitoring reports to DOH by the 28th of the following month. DOH had not received any of the monitoring reports for January 2008 to the date of the inspection. The review of the December 2007 monitoring report, and the prepared monitoring reports for January 2008 through October 2008, included a comparison of report monitoring requirements contained in the permit versus the data submitted by the Discharger to DOH (or summarized on the monitoring report for January 2008 through October 2008) and the results of that data versus limitations contained within the permit. Permit limitation exceedances were identified during the inspection and are summarized in the Major Findings portion of this report.

In addition, the discharge monitoring report for the annual storm water monitoring conducted in 2007 was requested as a component of this inspection. A copy of the storm water monitoring report was not available for review.

Site Review

A site review was conducted during the inspection. Site reviews are conducted to identify the following:

- Process/production modifications that may be pertinent to the NPDES permit:
- Treatment and collection systems to ensure they're properly maintained and in good operational order;
- Discharge locations, monitoring locations, waste streams, and on-site operations that are inconsistent with the NPDES permit, or irregularities that may be pertinent to the NPDES permit;
- Monitoring locations and methods to ensure they are representative of influent and effluent streams;
- General house keeping procedures to ensure that they are adequate to prevent/reduce the release of pollutants to the environment (i.e., proper implementation and maintenance of BMPs);
- Major on-site safety concerns that may interfere with the proper operation and maintenance of the Facility, and
- Any additional information that my be pertinent for determining compliance with NPDES permit requirements or may be pertinent for future NPDES permit renewals

During the site review, multiple observations of poor housekeeping were observed and are summarized in the Major Findings portion of this report. Further, during the inspection it became evident that the BMP Plan needed revisions to specific areas of concern at the Facility. See the Major Findings portion of this report for more information.

The berms at both the Pier P-3 location and shoreside to the dry dock were observed to have multiple breaches and provided multiple potential discharge locations for storm water. The berms at the Facility do not offer reliable secondary containment.

The portion of the Facility located on Pier P-3 does not appear to be addressed in NPDES Permit No. HI0021786 Potential discharges were identified that were not authorized under NPDES Permit No. HI0021786

Major Findings

 Part 4 of the Standard Provision requires the Permittee to submit a new application 180 days before the existing permit expires if the Permittee wishes to continue activities regulated by the permit. NPDES Permit No. HI0021785 expires on March 31, 2009. A renewal application was due by October 2, 2008. Following the inspection, the inspector was informed on February 6, 2009 by DOH that the Permittee submitted their permit renewal application on January 29, 2009. The Permittee did not submit their permit renewal application at least 180 days before the expiration date, as required.

Part A.2 a of NPDES Permit No. HI0021786 establishes effluent limitations and monitoring requirements for storm water runoff associated with industrial activity through Outfall Serial Nos. 003 and 004.

The Health, Safety, and EPA Compliance Officer was unaware of the storm water monitoring requirements contained in the permit and was unsure of the exact storm water monitoring locatron for shoreside activities. In addition, the Facility representative was unable to provide a recent storm water monitoring report (Standard Provision 14.b requires that all monitoring records be maintained for a minimum of 5 years). As a result, the Discharger could not demonstrate that storm water monitoring is being conducted as required by Part A.2 a of the permit.

Part B.5.a of NPDES Permit No. HI0021786 requires the Discharger to review and update the BMPs Plan as needed to comply with the permit, within 30-days from the date that the changes were made. Further, the Discharger must maintain documentation of all changes made to the plan.

The most recent BMP Plan available for review on the date of the inspection was last revised in October 2002. The BMP Plan tides not appear to have been updated during the term of the current permit and does not accurately reflect current Facility site conditions. The BMP Plan incorrectly refers to Outfall Senal No. 004 as the storm water discharge from the dry dock (Outfall Senal No. 004 is the storm water discharge point for land based operations), and Outfall Senal No. 005 as a storm water discharge from the land based operations (Outfall Senal No. 005 is the discharge point for non-contact cooling water). The BMP Plan also refers to Outfall Senal No. 006 (for storm water runoff from land based operations), 007, 008, 009, and 010 (for non-contact cooling water).

In addition, the BMP Plan does not address potential storm water discharge locations, potential pollutants, and additites performed on the portion of the Facility located on Pier P-3.

 Part B 4 s of NPDES Permit No. HI0021786 requires the Discharger to maintain monthly logs of all dry dock cycling activities

Analytical data from Inalab indicates that a monitoring event occurred on June 2, 2008 while undocking the "Wild Thing". A review of the dry dock cycling log does not record this cycling event, however states that the "Wild Thing" was undocked on May 27, 2008, with the "Tiger 3". A review of analytical records indicates that monitoring did occur on May 27, 2008, but only for the undocking of the "Tiger 3". The dry dock cycling log is inconsistent with the monitoring records. Further, a

chain-of-custody was not available for the June 2, 2008 monitoring event (as required by Standard Provision 14.c).

A copy of the dry dock cycling log and analytical data for June 2, 2008 is included in this report as Attachment A.

5 Part B.4.b of NPDES Permit No. HI0021786 requires the Discharger to maintain daily logs documenting all the sand blasting activities conducted at the Facility and submit a summary of each month's logs with the monthly monitoring reports.

The Facility representative was unable to provide a log documenting sand blasting activities at the Facility. Standard Provision 14.b requires that all monitoring records be maintained for a minimum of 5 years.

 Part B.4.e of NPDES Permit No. HI0021786 requires the Discharger to maintain onsite rain gage records and submit a summary of the logs with the monthly monitoring reports.

The Facility representative was unable to provide records of rainfall at the Facility Further, the Facility representative stated that a rain gage had been purchased, but had not yet been installed. A usable rain gage was not available for observation on the date of the inspection.

7 Part C.1.d of NPDES Permit No HI0021786 requires the Discharger to submit monitoring reports (or have them postmarked), no later than the 28th day of the month following the completed reporting period, to the EPA and DOH.

Prior to the inspection DOH indicated to the inspector that no monitoring reports have been received from the Discharger for the months of January 2008 through October 2008. The Facility representative stated that the monitoring reports for January 2008 through October 2008 had been mailed as required by the permit, however they had failed to arrive at DOH each month. A copy of these final reports was not available for review on the date of the inspection (Standard Provision 14 b requires the Discharger to maintain records for a minimum of 5 years), no evidence that these reports had been submitted to DOH was available to confirm the statement made by the Facility representative.

The Facility representative provided to the inspectors "draft monitoring reports" for January through October 2008, however the Facility representative stated that these had not undergone final review and did not contain a certification signature as required under Standard Provision 5.d. DOH had previous notified the Facility that the monitoring reports for January 2008 through October 2008 had not been received. Thus, the Facility representative stated that they intended to complete the draft monitoring reports and subsequently submit them to DOH.

8 A detailed review of the draft monitoring reports and analytical data for February 2008, May 2008, and June 2008 was conducted to determine if permit limit exceedances had occurred during the period in which monitoring reports were not received by DOH. The following exceedances of the effluent limitations contained in Part A.1.a of NPDES Permit No. HI0021786 were identified for harbor water flowing off the dry dock:

Table 1 February 2008

Demmatar	Effluent	Monitoring/Discharge Events 2/2/2008	
Parameter	Limitation		
Copper	2.9 µg/L	83 µg/L	
Zinc	95 µg/L	100 µg/L	

Table 2. May 2008

Parameter	Effluent	Monitoring/Discharge Events	
	Limitation	5/19/2008	5/27/2008
Copper	2.9 µg/L	390 µg/L	1,300 µg/L
Zinc	95 µg/L	510 µg/L	490 µg/L

Table 3. June 2008

Bernetten	Effluent	Monitoring/Discharge Events		
Parameter	Limitation	6/2/2008	6/10/2008	6/20/2008
Copper	29 pg/L	590 µg/L	470 µg/L	790 µg/L
Zinc	95 µg/L	310 µg/L	200 μg/L	200 µg/L

For the months of March, July, September, and October 2006, the Discharger had indicated that there were no discharges from the Facility. Due to time constraints on the date of the Inspection, monitoring reports for April and August were not reviewed.

A copy of the Draft February, May, and June 2008 monitoring reports and the applicable analytical data is included as Attachment B.

Standard Provision 14 b requires that all monitoring records be maintained for a minimum of 5 years.

It was observed in the dry dock cycling log that a cycling event occurred on August 22, 2008. Part A.1.a requires the Discharger to conduct monitoring during each dry dock cycle. The dry dock cycling log does state that monitoring occurred at the limit of the cycling, however a copy of the analytical data for this monitoring event was not available for review on the date of the inspection. The Facility representative stated that a copy of the analytical data could be retrieved from the laboratory if nocessary.

A copy of the page in the dry dock cycling log that indicates a cycling event occurred on August 22, 2008 and that affluent and ambient monitoring occurred is included into Attachment C.

10 Part A.4 of NPDES Permit No. HI0021786 requires the Discharger to use test methods promulgated in 40 CFR Part 136.

The Facility representative stated that all effluent samples for the harbor water running of the dry dock is taken using a plastic scoop and a plastic bucket, prior to distributing the effluent into the appropriate sample containers issued by the contract laboratory. 40 CFR Part 136 requires that all samples for oil and grease be taken directly into a glass container. The monitoring method described by the Facility representative for sampling oil and grease does not meet the requirements of 40 CFR Part 136.

11 Standard Provision 14 b requires the Discharger to retain all monitoring information including calibration records for a minimum of 5 years. Standard Provision 3 c requires the Discharger to periodically calibrate all monitoring and analytical equipment at 6 month intervals or the manufacturer's recommended intervals.

Calibration records for the pH meter used by the Discharger to demonstrate compliance with the effluent limitations contained in NPDES Permit No. HI0021786 were not available for review. The Facility representative indicated that these records were not maintained.

12 Standard Provision 3 c requires the Discharger to periodically calibrate all monitoring and analytical equipment to insure the accuracy of measurements. The Facility conducts pH analysis on-site using a pH meter, to determine compliance with the effluent limitations contained in NPDES Permit No. HI0021786.

The pH buffer (4.0) available on-site to conduct the calibrations of the pH meter had an expiration date of October 2004. A current pH buffer was not available for the calibration of the pH meter.

13 Parts B.2.a through B.2.i of NPDES Permit No. HI0021786 establishes pollution prevention measures required by the Discharger. Part B.5 of NPDES Permit No. HI0021786 requires the Discharger to develop and implement a BMP[s] Plan to reduce pollutants discharged from the Facility, and update the BMP[s] Plan as needed.

The Discharger has developed a BMP Plan, a portion of which is included as Attachment D to this report.

Breaches of the berm surrounding the shore side area next to the dry dock were observed down the entire length of the berm (Photo Nos. 49, 54, 55, and 58). In addition, the deck of the dry dock was observed to not have a berm (Photo No. 59). The Facility representative stated that the berm around the deck of the dry dock had been removed.

14 The following observations at the dry dock, and shore side of the dry dock, were made during the inspection and do not appear to comply with the proper implementation of BMPs as specified in either Part B of NPDES Permit No. HI0021786 or the Discharger's BMP Plan (dated October 2002):

- a. Two 55-gallon drums of used oil were observed stored without secondary containment on the shore side staging area beside the dry dock (Photo No. 51). This does not appear consistent with Part B.2.) of the permit which states, "The Permittee shall maintain land-based operations in a clean and orderly manner and implement measures to prevent pollutants from contacting storm water runoff. Further this is not consistent with land-based operation BMPs of the Discharger's BMP Plan (on page 8), which states that spill pallets will be on-site and used.
- b. A mixture of oil and condensate was observed dripping directly on the ground from an air compressor on the shore side staging area beside the dry dock (Photo No. 53). This does not appear to be consistent with Part B.2.) of the permit which states. The Permittee shall maintain land-based operations in a clean and orderly manner and implement measures to prevent pollutants from contacting storm water runoff.
- c. Sand blasting grit was observed spilled on the ground, shore side of the dry dock (Photo No. 56). Further, multiple bags of new sand blasting grit were observed stored on-site without cover (Photo No. 57). This does not appear consistent with Part B.2.) of the permit which states, 'The Permittee shall maintain land-based operations in a clean and orderly manner and implement measures to prevent pollutants from contacting storm water runoff. Further, this is not consistent with land-based operation BMPs of the Discharger's BMP Plan (on page 8 of the Plan), which states that sand blast grit [new or spent] will be covered.
- d. The dry dock does not have any structural BMPs, such as a berm (Photo No. 59) to contain potential discharges from washing/cleaning activities. The Discharger's BMP Plan states, under low pressure/low volume cleaning, and ultra-high pressure water blasting (pages 4 and 5), that a 4" inch berm is on the toreward and after ends of the dry dock to contain any liquids generated on-site. The Facility representative further stated that temporary berms or containment BMPs are not set up on the dry dock.
- e Zinc anodes were observed stacked on a pallet on the dry dock (one zinc anode was observed directly on the deck of the dry dock), uncovered where it could be exposed to potential rainfall and storm water runoff, and potentially contaminating the deck of the dry dock with zinc (Photo Nos. 61 and 62). Zinc was identified during the monitoring reports review to be a pollutant of concern in the effluent from the dry dock, that has frequently exceeded the effluent limitations contained in the permit. The BMP Plan does not appear to address storm water contamination and the contamination of the dry dock deck by zinc anodes. Part B.5 of the permit requires the Discharger to implement a BMP Plan to reduce pollutants from the Facility, and review the

BMP Plan as needed to comply with the permit. The BMP Plan should be revised to address potential sources of zinc pollution, including the handling and storage of zinc anodes.

13 The portion of the Facility located on Pier P-3 is not permitted under NPDES Permit No. HI0021786, nor is it permitted under the Hawaii general industrial storm water permit. NPDES Permit No. Hi0021786, Part B.1 prohibits discharges to the receiving water not specifically authorized under the permit. Further the Pier P-3 portion of the Facility is not addressed in the BMP Plan. Activities and discharges from the portion of the Facility located on Pier P-3 do not appear to be authorized under the NPDES program. The following findings are observations of the portion of the Facility located on Pier P-3.

The berms around the main yard, JR's area, and the storage area behind the main yard were observed to have breaches, deliberate discharge structures, or areas that lacked containment, resulting in potential storm water discharge locations (Fhoto Nos. 8, 10, 11, 15, 29, 24, 25, and 27).

Due to the tack of sufficient berming, and the potential for storm water discharges, the following observations were made regarding the need for secondary containment or over head coverage:

- A 55-gallon drum of engine oil, adjacent to the receiving water, next to the main yard (Photo No. 3);
- b A 55-gallon drum of hydraulic fluid, adjacent to the receiving water, next to the main yard (Photo No. 6);
- c. A "make-shift" drip pan containing an unidentified liquid resembling a petroleum product, next to the berm in the main yard, uncovered and exposed to potential rain fall, and without additional containment (Photo No. 7);
- d. A pallet of batteries next to the berm in the main yard (Photo No. 9).
- e. Large quantities of paint and paint thinner, next to the berm in the main yard (Photo 14). The Facility representative stated that this was a temporary measure while they cleaned out their paint storage lockers.
- A drip pair for an air receiver, next to the metal working building, which
 was full of a mixture of oil and condensate. The drip pan was uncovered
 and exposed to potential rain fall, and without additional containment
 (Pnoto No. 16);
- Two 55-gallon drums of oily water in the main yard, next to the berm, without secondary containment (Photo No. 17);

- h. A box/pallet of zinc anodes, and a couple pallets of paint cans, in the storage area behind (northwest) of the main yard, behind the metal working building (Photo Nos. 19, 20, and 21);
- A 5-gallon bucket of motor oil in JR's Area, without containment (Photo No. 28).
- Three 55-gallon drums of petroleum products in JR's area without secondary containment (Photo Nos. 29, 30, and 31);
- k. Two 55-gallon drums of paint related waste (potentially hazardous waste, unlabeled) in JR's area, without secondary containment (Photo Nos. 32 and 33);
- A tole of diesel fuel, improperly labeled as flooculant, stored next to the hazardous waste storage area (the tote was identified as diesel fuel by the Facility representative) (Photo Nos. 34 and 35); and
- m. A drip pan for a 3,000 gallon diesel tank, half full of diesel, next to the hazardous waste storage area, exposed to rain fall, Without secondary containment (Photo No. 36).
- 16. The Discharger had recently concreted portions of the main yard, JR's area, and the storage area behind (northeast of) the metal working building. Evidence of concrete not being properly contained, and in some cases overflowing into the receiving water, was observed (Photo Nos. 12, 22, and 26).
- Signs of spillage and staining were observed in portions of the main yard (Photo No. 13)
- 18 A discharge of wash water runoff was observed from the storage area behind (northeast of) the metal working building through an intentionally built discharge point. A worker was observed spraying down the area to a discharge location. In addition to the storage of zinc anodes and paint cans, two dogs were observed kenneled in this area (Photo Nos. 23 and 24).
- Spent blasting grit was observed stored in JR's area without coverage (Photo No. 25).
- 20. Two workers were observed mixing cement on the work barge. Well cement was observed on the ground of the work barge. Runoff from the cement mixing was observed running under the wall and down the side of the work barge into the receiving water (Photo Nos. 37, 38, and 39).
- The deck of the work barge was observed to be covered in rust chips/dust, which were exposed to potential storm water runoff (Photo No. 42).

- Zinc anodes were observed in direct contact with the deck of the work barge, and exposed to potential storm water runoff (Photo Nos. 43 and 46).
- 23 Hoses used to supply workers with potable water as they work on-board docked vessels were observed leaking and draining over the edge of the work barge (Photo Nos. 43 and 44).
- 24. A sink was observed on the stern of the work burge. The Facility representative stated that he believes the sink discharges directly into the harbor below. The Facility representative stated that the sink was used for washing hands and cleaning fish. Due to the location of the sink, it was not possible to confirm the discharge location of the sink into the harbor.

Inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Heelth)

The following photographs were taken during the inspection of Marisco, LTD, during the NPDES compliance evaluation inspection on December 9, 2008, by a USEPA contractor, Dan Connally (PG Environmental, LLC.) and Matt Kurano (HI Department of Health)

Portion of Facility	Photograph(s)
Main Yard	I through 18
Storage Area Behind Main Yard	19 through 24
Storage Area at Southeast End of Main Yard	25 through 33
Hazardous Waste Storage Area	34 through 36
Work Barge	37 through 46
(Il' Parris - Shore Side	47 through 58
Lil' Partis - Dry Dock	59 through 62

inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)

Main Yard



Photo 1: This photograph provides an overview of the dock, beyond the containment berm and on the edge of the water. This photograph is taken facing northwest. This area appeared to be used mostly as a walk way to the docked vessels, however observations during the inspection suggest that at a minimum, temporary or short-term storage of materials, including petroleum products, occurs at this location.

Inspection Date: December 9, 2008 Page 1 of 40



Photo 2: This photograph provides an overview of the main yard from approximately 3/4ths of the way down the southeast side. The Facility representative stated that most of the rainfall that occurs on-site is collected in the middle of the yard in three dry wells. The Facility representative was unsure of the volume of the dry wells. The gradient of the concreted area does suggest that the majority of the rainfall would drain toward the center of the main yard and into the dry wells. However, the gradient of the main yard near the bermed area was not apparent, and evidence of flow through gaps in the berm were observed during the inspection.



Photo 3: This photograph provides an overview of the dock, beyond the containment berm on the edge of the water, slightly further back than Photo 1. A 55-gallon drum of engine oil was observed on-site, exposed to potential rain fall, adjacent to the receiving water, and without secondary containment.

Inspection Date: December 9, 2008 Page 3 of 40



Photo 4: This photograph provides an overview of the dock, beyond the containment berm on the edge of the water, between the "Working Barge" and "JR's Area". This photograph is taken facing southeast. The 55-gallon drum pictured above is a spill kit.



Inspection Date: December 9, 2008 Page 4 of 40

Inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)

Photo 5: This photo was taken from the on-site "work barge", and depicts the drop-off from the bermed areas of the Facility directly into the receiving water. This is typical of the area referred to as "JR's Area" (area pictured above), and the portion of the main yard at the northwest end of the Facility, beyond the dockside walk way.



Photo 6: A 55-gallon drum of hydraulic fluid was observed on-site, adjacent to the receiving water, without secondary containment.



Inspection Date: December 9, 2008

Photo 7: Unidentified liquid contained in a "make-shift" drip pan, resembling other petroleum products observed on-site, in the main yard adjacent to the berm surrounding the main yard.



Photo 8: A break in the berm for the main yard.



Inspection Date: December 9, 2008 Page 6 of 40

Inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)

Photo 9: A pallet of used batteries stored in the main yard, adjacent to the berm around the main yard. A drainage hole in the berm was observed down gradient of this location (see Photo 9).



Photo 10: A drainage hole in the berm of the main yard, down gradient of the pallet of used batteries.



Inspection Date: December 9, 2008 Page 7 of 40

Inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)

Photo 11: Debris and silf were observed around the drainage hole in the berm. Signs of erosion were observed on the water's side of the berm, indicating that discharges from this drainage hole have occurred. Flow through this discharge location would flow down the bank and directly into the receiving water.



Photo 12: An ongoing construction project was observed on-site. Evidence of concrete spillage into the receiving water was observed on-site.



Inspection Date: December 9, 2008

Inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)





Photo 14: Large quantity of buckets of paint and paint thinner were observed in the yard, uncovered and without secondary containment. The Facility representative stated that this was a temporary measure while they cleaned out their paint storage lockers.



Inspection Date: December 9, 2008 Page 9 of 40

Inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)

Photo 15: This is a photograph of the northwest end of the main yard. The Facility does not have a berm at this end of the Facility. Note the on-site spill kit.



Photo 16: A drip pan for an air receiver located beside the metal working building full of a mixture of oil and condensate was observed. The drip pan was uncovered, exposed to potential rain fall, and without additional containment.



Inspection Date: December 9, 2008 Page 10 of 40

Inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)

Photo 17: Two 55-gallon drums of oily water were observed next to the berm without secondary containment.



Photo 18: Material storage on the northwest end of the main yard. Engines, pumps, and other equipment were observed in this area.

Inspection Date: December 9, 2008

Inspected by: Dan Connalty (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)

Storage Area Behind Main Yard



Photo 19: An area northwest of the main yard, behind the metal working building appears to be used for material storage. Materials stored in this area include paint, zinc anodes, and 55-gallon drums. This area does have a containment berm, which directs all storm water to a storm water discharge location pictured in Photo Nos. 23 and 24. A pallet of paint cans was observed stored on-site, exposed to potential rainfall, and in the direct drainage area to a storm water outfall.

Inspection Date: December 9, 2008 Page 12 of 40.



Photo 20: Additional cans of paint and zinc anodes were observed stored behind the metal working building, southwest of the main yard, exposed to potential rainfall and in the direct drainage area to a storm water outfall.



Photo 21: A wooden box of old zinc anodes were observed stored in the area behind the metal working building, exposed to potential rain fall and in the direct drainage area for a nearby storm water discharge location.

Inspection Date: December 9, 2008 Page 13 of 40



Photo 22: Evidence of concrete spillage from an on-site construction activity (possibly the construction of the concreted area itself or the berm) toward the receiving water. It is unclear if any of the concrete actually entered the receiving water. However this photo demonstrates a lack of effective best management practices utilized for the construction project by the Discharger this close to the edge of the receiving water.

Inspection Date: December 9, 2008 Page 14 of 40



Photo 23: During the inspection, a storm water discharge location for the concrete area behind the metal working building was observed. Zinc anodes and paint cans are stored in this location. In addition, two dogs were observed chained in this area. Later in the day, a worker was observed hosing down the area toward the storm water outfall. Wash water runoff is visible discharging down the outfall.

Inspection Date: December 9, 2008 Page 15 of 40



Photo 24: Another photograph of the storm water outfall for the area behind the metal working building. Wash water runoff is visible discharging down the outfall.

Inspection Date: December 9, 2008 Page 16 of 40

Storage Area at Southeast End of Main Yard (JR's Area)



Photo 25: A view from the on-site working barge of the storage area at the southeast end of the main yard. This area was referred to by the Facility representative as "JR's Area". This area has a berm, with identified discharge locations (at the south end of the berm or left side of the photograph, and a gap in the berm to the right where the photograph cuts off). Materials observed stored in this location include used sand blasting grit, heavy equipment, petroleum products, and paint waste (what appeared to be a mixture of paint and paint thinner).

Inspection Date: December 9, 2008 Page 17 of 40



Photo 26: Evidence of concrete spillage from an on-site construction activity (possibly the construction of the concreted area itself or the berm) toward the receiving water. It is unclear if any of the concrete actually entered the receiving water, although concrete observed on the very edge of the metal frame work would indicate that it did. However this photo demonstrates a lack of effective best management practices utilized for the construction project by the Discharger this close to the edge of the receiving water.

Inspection Date: December 9, 2008 Page 18 of 40

Inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)



Photo 27: A gap in the berm surrounding JR's area. Discharges through this gap would flow down the bank and directly into the receiving water.



Photo 28: This photograph shows a 5-gallon bucket of motor oil (as identified by the Facility representative) in "JR's Area", without secondary containment.

Inspection Date: December 9, 2008 Page 19 of 40



Photo 29: Three of the 55-gallon drums pictured (and labeled) above appeared to contain petroleum products, including motor oil and diesel fuel. These drums are not in a contained area, do not have secondary containment, and are exposed to potential rain fall.



Photo 30: One of the three drums referenced above.

Inspection Date: December 9, 2008 Page 20 of 40



Photo 31: One of the three drums referenced above.



Photo 32: Two 55-gallon drums of "paint related waste" (as described by the Facility representative), which appeared to be a mixture of paint and paint thinner were stored on a secondary containment pallet, in "JR's Area", outside the designated hazardous waste storage area. The drum pictured above was opened by the Discharger at the inspector's request (as shown in Photo 31). One of the drums was hanging over the edge of the containment pallet.

Inspection Date: December 9, 2008 Page 21 of 40



Photo 33: A photograph of the substance inside one of the two 55-gallon drums described in Photo 32. The drum pictured above was opened by the Discharger at the inspector's request.

Inspection Date: December 9, 2008 Page 22 of 40

Inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)

Hazardous Waste Storage Area



Photo 34: Hazardous waste storage area located adjacent to the main yard entrance of the Facility. Additional drums of paint related waste is shown above, outside the hazardous waste containment area. The white tote has been filled with diesel fuel and is inappropriately labeled as flocculent. Approximately 11 totes were observed in the area, outside any containment area, with residual liquid.

Inspection Date: December 9, 2008 Page 23 of 40



Photo 35: A tote originally used for flocculent was being used to store diesel fuel, without secondary containment. The tote was labeled as flocculent.



Photo 36: A drip pan for a 3,000 gallon diesel tank was observed containing diesel, open and exposed to rain fall, without secondary containment.

Inspection Date: December 9, 2008 Page 24 of 40

MARISCO, LTD. (NPDES No. HI0021786) Photo Log

Inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)

Work Barge

The "work barge" is a barge that is docked along the main yard of the facility and appears to be used mainly as a staging area and material storage area for work performed on vessels that are docked at the facility.



Photo 37: Two workers were observed mixing cement on the work barge. Wet cement was observed on the ground of the work barge. Runoff from the cement mixing was observed running under the wall and down the side of the work barge into the receiving water, as shown in Photo No. 39.

Inspection Date: December 9, 2008 Page 25 of 40

MARISCO, LTD. (NPDES No. HI0021786) Photo Log

Inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)



Photo 38: A closer photograph of the runoff from the cement mixing going under the wall of the work barge. Further, the Facility representative stated that condensate from the ice maker discharges under the wall and over the side of the work barge as well.



Photo 39: Evidence of runoff from the cement mixing on-board the work barge.

Inspection Date: December 9, 2008 Page 26 of 40

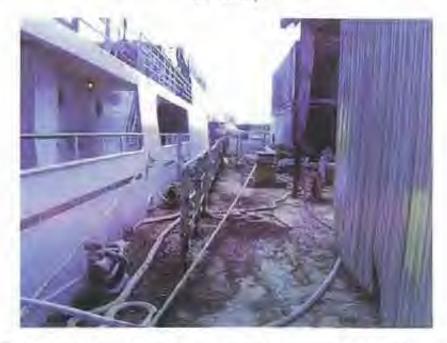


Photo 40: The floor of the work barge was covered in general debris and rust chips/dust, exposed to potential storm water runoff.



Photo 41: Debris and materials scattered on the floor of the work barge outside a storage shed. Two 55-gallon drums of oil were observed on the deck of work barge, without secondary containment.

Inspection Date: December 9, 2008



Photo 42: This is the deck of the work barge facing northwest. Note the rust chips/dust, zinc anode, and dripping water on the deck.



Photo 43: These water lines are used to supply the workers with potable water as they work on-board vessels. The line/hose hook ups were observed leaking and draining over the edge of the work barge. Also pictured above is a zinc anode on the deck of the work barge, near the draining water.

Inspection Date: December 9, 2008 Page 28 of 40



Photo 44: Potable water from hoses on the work barge was observed flowing over the deck and into the receiving water.



Photo 45: A sink was observed on the stern of the work barge. The Facility representative stated that he believes the sink discharges directly into the harbor below. The Facility representative stated that the sink is used for washing hands and cleaning fish. Due to the location of the sink, it was not possible to confirm the discharge location of the sink.

Inspection Date: December 9, 2008 Page 29 of 40



Photo 46: Another zinc anode observed on the deck of the work barge, exposed to potential storm water runoff.

Inspection Date: December 9, 2008 Page 30 of 40

MARISCO, LTD. (NPDES No. HI0021786) Photo Log

inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)

LII' Parris - Shore Side



Photo 47: The photograph above is an overview of the northeast portion of the shore side staging area for the Lil' Perris dry dock. This area is used by the Discharger for storing materials for work performed on the dry dock. Materials stored in this area include scrap metal, old tires, cables, and machinery. Other materials are stored on-site in covered sheds.

Inspection Date: December 9, 2008 Page 31 of 40



Photo 48: The shore side staging area for the Lil' Perris dry dock has a berm built from cement pillars. Plastic sheeting has been laid down against the pillars and covered with dirt, however the plastic sheeting has torn away in most areas and gaps are prevalent along the entire berm.



Photo 49: One of the gaps in the berm surrounding the shore side staging area for the Lil' Perris dry dock.

Inspection Date: December 9, 2008 Page 32 of 40



Photo 50: An overview of the Lil' Perris dry dock and the berm structure.



Photo 51: Two 55-gallon drums of used oil were observed stored without secondary containment on the shore side staging area beside the Lil' Perris dry dock.

Inspection Date: December 9, 2008 Page 33 of 40



Photo 52: Staining of the ground by exhaust from an on-site air compressor.



Photo 53: A mixture of oil and condensate dripping from the above pictured air compressor.

Inspection Date: December 9, 2008 Page 34 of 40



Photo 54: Another gap developed through erosion in the berm.



Photo 55: Another gap in the berm.

Inspection Date: December 9, 2008 Page 35 of 40



Photo 56: Sand blasting grit was observed on the ground, exposed to potential storm water runoff.



Photo 57: Sandblast grit stored on-site, un-covered.

Inspection Date: December 9, 2008 Page 36 of 40



Photo 58: Another gap in the berm.

Inspection Date: December 9, 2008 Page 37 of 40

Inspected by: Dan Connally (PG Environmental, LLC); Matt Kurano (Hawaii Department of Health)

Lil' Parris - Dry Dock



Photo 59: An overview of the Lil' Perris dry dock facing northeast.



Photo 60: A vessel was docked in the Lil' Perns dry dock on the date of the inspection. Work on the vessel was not performed in the presence of the inspector; however work on the vessel had occurred early in the day.

Inspection Date: December 9, 2008 Page 38 of 40



Photo 61: Zinc anodes were observed stored on the dry dock, uncovered and exposed to potential rain fall.



Photo 62: A zinc anode was observed on the floor of the dry dock, exposed to potential storm water runoff.

Inspection Date: December 9, 2008 Page 39 of 40



ATTACHMENT A

Analytical data from Inalab Indicates that a monitoring event occurred on June 2, 2008 while undocking the "Wild Thing". A review of the dry dock cycling log does not record this cycling event, however states that the "Wild Thing" was undocked on May 27, 2008, with the "Tiger 3". A review of analytical records indicate that monitoring did occur on May 27, 2008, but only for the undocking of the "Tiger 3". The dry dock cycling log is inconsistent with the monitoring records.

MI Still MoCurtons
Managem, Last
81 817 Mocardons Floors

Pliane Number: Festivale (8(8) 082-1933 (700) 082-4845

Fee

III Administration (mark)

Analytical Results

MARGIO

WALAB JOB NO: 20050952

15707

CLIENT REFERENCE: ABQ-02; P.O. 879215 (6/2/05); UNDOCK - WILD HING

	****** Total Recoverab	le Coppe	r in Soaw	ator	******	
MALAB NO	Mothod: 286 12 / 220.2 Year Samula Description	Sample Type	Results	Delta	Date Submitted	Analyzad
THEMBOODIA	LIL PERRIS: Composine Water - AMMENT (As; Cor Cr Tin Pb; Hg; Zn)	UNA	17	Ng/E	5/3/88	6/73/88
PRODUCTIONS	I'L PERRIS COMPANIE Water - EVFLUENT (AK) Die C: Die Re; No. 201	ENK	-986	1484	8/2/06	HOLINE
2008080302A	LIL RERRIS Composite Water - METALE CONTROL (As. Cal Cr. Cq. Pb. Hg. Ed)	UNIE	1.9	ug/L	6/4/00	6/23/08
питсы ослож Аналуга Кеспи	rery (%): 100 Procision		+1		ritism Blank:	Assignation
NALAB NO	Method: 300.12/739.1/2003 Your Sample Description	Lample Type	In Scawa	Unite	Date Submitted	Date Analyzed
UNISUEUSO16	Lit. PERRIS: Composite Water - AMRIENT (As; Cd) Cn Co; Pto rtg. Zo)	ONE	* 47	NB/L	8/3/06	5/23/05
BAGEGRAKON!	LIL PERRIS Composito Water - EFFILIENT IAS.	-1096	* 44.	.ogt.	60008	NESTA
	Did City Dus Plas Play Ziny					
HEMARKS.	LIL PERFOS Composite Water - METALS CONTROL (14) OIL D. Oil Ph. Hg. Zn)	LIMIN	144	J.Dil	HASTON	1/23/08

INALAB, Inc. is an Alha IIILAP ACCREDITED LABORATORY (Accreditation No. 101812) with acops of accreditation including metals, solvents, fiber counts and bulk asbentos. INALAB, Inc. is a participant in the Compressed Air Proficiency Test (CAPT) program.

7 JULY TOOK

SHATTED DOCUMENT Amerylaw Names, Pov. 70050010

Page 4 of E

MIE	Action Nessel	Type Vessel	Sched Tim	4 Actual	Comments
5/1200	UNDOCK MIRI'DI	Tug	\$700	0730	EFF-0735
5/24/08 5/20/08	Tiger 3	Tay	8800	0815	No action Regund Clear Deel
5/27/08	KBOS WILLHING	Tug. Tourbout	0430	0700	AMB -0015
5/27/08	DOCK MV FINOLA	Coeffe	1500	1500	No Acti- Regund
5/25/08	a lice	CAHLE	1400)	1450	AMB-1350
41/08	Dock January Smith	Tug	8,30	83:15	26 Action Raguera
6/10/00	UNDUCK JAMES SAIT	Tug	6900	0915	AMB-0143 BOF-0930
3/14/08	Docil Souse Kokun	Tuş	1900	1400	Do Actor Reg.
pages	UNDOCK Koleen	Tog	1300	1330	And 13215

ATTACHMENT B

A detailed review of the draft monitoring reports and analytical data for February 2008. May 2008, and June 2008 was conducted to determine if permit limit exceedances had occurred during the period in which monitoring reports were not received by DOH. Effluent limit exceedances are summarized the 'Major Findings' section of this report, Finding 8. The corresponding discharge monitoring reports and analytical data are included in this attachment.

MATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDSU) DISCHARGE MONITORING REPORT (DMR)

CHECK TOWN

NAME:

MARKEGO LTD

ADDRESS: 81-907 MALAKOLE RD EAPOLE, HI 9/7/07

FACILITY) "LIL" PERRIS FLOATING IS O'D'S

LOCATION: 01-607 MALAKOLE RU

KAPOLEI, HI 96707

H8021785 PERMIT NUMBER

002A DISCHARGE NUMBER

		- N	ONTO	RING	PERIOR	1	
	YEAR.	MO	DAY		YEAR	MO	DAY
PROM	00	02	01	TO	06	va.	28

DWII WYITH GODE!

MINOR

Harrow water flowing off threstock during lowering Enhance Ciribia

No Discharge

PARAMETER	1	QUAN	TITY OR LOADING		IQ.	JALITY OR CON	CENTRATION		NO.	FREQUENCY OF ARREVINS	SAMPLE
1,000,000	T	WALUE	WALUE	UNITS	VALUE	VALUE	VALUE	UNITS	1		
Constitute total recoverage	SAMPLE MEASUREMENT	(Market)	1960	1		-	226			1/28	
Dt115 1 0 Ellueni Gross	PERMIT REQUIREMENT	data ter					3/1L M/s =	let.	75	Biskflurge	
Copper, (ola) meavemble	SAMPLE MEASUREMENT	-				_	83			1/20	
01119 1 0 Elbuart Gross	PERMIT		20 1 THY	100	- House		# 10 NO	10L	75	Unice -	0.000
Cili und gresus	SAMPLE MEASUREMENT	-	Jem-t		<u>(imi</u>		45		-	1/28	
03562 1 0 Stillment Green	PERMIT REQUIREMENT			-		111111111111111111111111111111111111111	EAL! MX	mys.	The same	Dhomen,	in them.
Triourylan, Total Racovernible	MEASUREMENT	-	-		()(-	NA			1/25	
51515 1 0 Efficient Gross	PERMIT REQUIREMENT	1000	VIII		3,000	2.00	5-11/100	mil	Da.	Carion Pile po (Executar pre-	C.00.950.
Marcury, John Fricowa	SAMPLE MEABUREMENT	******	Dec			-	20.1	-	-	1/200	
71901 1 0 Effuent Gross	PERMIT REQUIREMENT	n area	Bellin	J.			DAT MC	ough.	20 m	Unite Martin	25 u = 1
Pow	SAMPLE MEASUREMENT		-		resul	(positive)				1/28	
74075 U Effect Gross	PERMIT REQUIREMENT	Rog Mon DAIE / MK	1	gun					W =	Page 1	ESTIMA

MAINETITLE PRINCIPAL EXECUTIVE OFFICEIL	The same of the sa		TELS	ESHONE		DATE	
		SIGNATURE OF PRINCIPAL EXECUTIVE OFFICER OR					
TYPES OF PRINTED	Well-see	AUTHORIZED AGENT	ATT FOR	HAMBER	FEAT	NO.	DAY

COMMENTS AND EXPLANATION OF ANY VIOLATIONS (Reference tel allactiveness barel

US EPA ARCHIVE DOCUMENT

Bridging (B) (B) (Budding Paylors according to Conf.

EXPERIENTE AND EXPLUSATION OF ANY VIOLATIONS (In terms of a fine form)

TAMES OF PRINTED		HAMBITUTE INSTRUCTION DESCRIPTION CHROCK
	The state of the s	Constitution of the second second second second second second
Listable Compact Listab	THE PERSON NAMED IN COLUMN 2 I	
400.00		OP-65-731
12		200
5	-	DA7
ş		H

PARAMETER		931	DOMENT IN	States and an appropriate to the Tables States	Different Garrent	Managed Salve	OCHO D	Armen State or State of State	00071 E	The Indianapoints	Digit of Gross	Codmun. louis recoverable	Efficient Groups	and this incommon	Section of the last of the las
200		SAMPLE	PERMIT	SAMPLE	DEBINIT	SAMPLE MEASUREMENT	REGUIREMENT	NEWBURNENEWS FERTO	REQUIREMENT	SAMPLE MEASUREMENT	REQUIREMENT	SAMPLE MEASUREMENT	PERMIT	SAMPLE MEASUREMENT	PERMIT
TRAND	ANTOR	james .	S. Shee	person .	1 41	week	4	1		-	をは	*****	-000	-	- Delta
DNIGVOT BO ALLERYND	AVTIRE	******	1	-		ı	- N - I	1		- manner	Line	****	1	(ment)	and a
	RUNN					ľ			Ñ	17	A				
D	AVITAE	0.3	Members	1	T-T	1	100	-	1	-	The state of the s			1	1
DUALITY OR CONCENTRATION	MALAN	1	action.	1		1	- 1	ι	1	ı		-	10.1	Ł	18
CENTRATION	AVTUE	200	- Mohitokii	ムシ	De l'all	1.02	10 M	20.6	100	100	1/15/10	C3.3	PARTIES :	8117	Or Light
	STIND		12		ngt.	1	É		g.		6	N.	180		9.
e N			W		M		·V		M		W		15		
PHEDUNATY DE ANACYMEN		1/28	10/04/61	1/28	-	1/21	Z.	Str.		160	La Carp	1/28	Dp.	1/25	Appropriate Co.
TYPE			- WC		of the s		and a		0.000		-Insertary		Satisfacts.		(Loose

35 CC 30 01	YEAR MO DAY	MR PEROD	DISCHARGE NUMBER
No Discharge	External Outfail	Hutter wear family of dydion in agree in the	NOW

MOH			1	
80	HARY.	П	1,1776	HB22
0	NO		BRID	1788
0	DAY	TIMOS	90	
đ		DATE	0	F
3.6	YEAR	OPEN	SOHAR	
C	ME	0	N BOD	NOON

DORE	WIT-BOT MANUANCINE FED.
	KAPCHEL HI 95707
ACHITA	ADDOLAD BUNDA SING SENSON
OCATION:	MI-NET WALAKOLE RD
	MANUEL HI BERT

HAME WANTED LID

THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER, THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN C

DINR MALMEZIP OCCE

ě

DISCHARGE MONTORING REPORT (DMR)

M IIII McCeffery Marcon Lin U1-00f Malancia Road

Phone Number: (60) Fessimile: (80)

(001) 682-1933 (000) 682-5845

PERSONAL HIS DESTON

Analytical Results

SECONDES CH BOY BY YAM

CLIENT REFERENCE: POR 78357 (2728/00) ABSDA KAHANA AUH-04 MGANA

_	Total Recoverab	le Coppe	er in Seaw	rater	*****	
KPA.	Mothod: 200.12/220.2 Your Semple Description	Sample			Date	Date
20080229000	UNDOCK Katana/Molera - Lit'Pertis: Ambiens	Type	Armits.	Units	Softmitted	Analyzad
	Composite Water	MNK	0.3	MD/L	2/29/2009	3/17/2004
TEMARKS:						
200802290QU	UNDOCK Kahena/Mount - Lil/Peris: Ambient	DUP	6,8	ugit	3/79/2008	(917/2c)(iii
HEMARKS	Confessive Waller			- 21	27.267.27	III Listania
20080225019	UNDOCK Karlanz/Moerts - Cit Perris. Ethiasis Dominoste Weller	FRAN	53	101	2/28/2000	3/17/2000
REMARKS						
REMARKS	UNDOCK Kommunitation - Li Peris: Melafe Commi	LINE	1.8	oot.	2/29/2008	3/17/2006
				_		
BATCH OCIDA Analyte Recov	ery (%): 100 Precision	(% RPD) to	C / S		stam Bisner	осерчани
		73 - 7 7	C / S		esem Blank;	oceptation
Anulyte Radov	Precision Total Recoverst Method: 200.15 / 259.1 / 239.2	ole Load	C / S			
Analyte Racov	ery (%): 100 Precision Total Recoverat	73 - 7 7	C / S			Dute Analyzed
Analyte Recov BPA INALAS NO	Precision Total Recoverst Method: 200.15 / 259.1 / 239.2	ole Load	in Seawa	ter	Date	Dute
Anulyte Radov	Method: 200.13 / 259.1 / 939.2 Your Surright Concription LIND/OCK Hohans/Mount - LitPenne, Ambiens	Sample Type	in Seawat	ler Units	Date Submitted	Dute Analyzed
Analyte Recov	Method: 200.13 / 259.1 / 939.2 Your Surright Concription LIND/OCK Hohans/Mount - LitPenne, Ambiens	Sample Type	in Seawat	ler Units	Date Submitted	Dute Analyzed
Analyte Recov	Method: 200.13 / 259.1 / 839.2 Your Sample Ceachyllion UNDOCK Hohans/Mouna - Lit Penns. Ambiens Gomponite Water UNDOCK Kenns/Mouna - Lit Penns. Ambiens	Sample Type UNK	Results	Units Units	Date Submitted 2/20/2005	Duse Analyzed arts/2008
Analyse Recov	Method: 200.13 / 259.1 / 839.2 Your Sample Ceachyllion UNDOCK Hohans/Mouna - Lit Penns. Ambiens Gomponite Water UNDOCK Kenns/Mouna - Lit Penns. Ambiens	Sample Type UNK	Results	Units Units	Date Submitted 2/20/2005	Duse Analyzed arts/2008
Analyte Recover BPA INALAS NO PROBEOZOGO PROBEOZO PROBEOZOGO PROBEOZOGO PROBEOZOGO PROBEOZO PROBEO	Method: 200.13 / 259.1 / 239.2 Your Sumple Ceachyllian UNDOCK Kahana/Moung - Lit Perris: Ambient Composite Water UNDOCK Kahana/Moung - Lit Perris: Ambient Composite Water UNDOCK Kahana/Moung - Lit Perris: Stillient	Sampla Type LINK	Results 4 94	ter tinits part	Date Submitted 2/20/2005	Date Analyzed a/13/2008
Analyse Recover Analyse Recover Remarks	Method: 200.13 / 259.1 / 239.2 Your Sumple Ceachyllian UNDOCK Kahana/Moung - Lit Perris: Ambient Composite Water UNDOCK Kahana/Moung - Lit Perris: Ambient Composite Water UNDOCK Kahana/Moung - Lit Perris: Stillient	Sampla Type LINK	Results 4 94	ter tinits part	Date Submitted 2/20/2005	Duse Analyzed a/13/2009

INALAS, Inc. is an AIHA IHLAP ACCREDITED LABORATORY (Accreditation No. 101812) with scope of accreditation including metals, solvents, fiber counts and bulk asbestos. INALAS, inc. is a participant in the Compressed Air Proficiency Test (CAPT) program.

AN PROPERTY AND

Continued Document, Analytical Proport, Plan. 20030919

Page 4 of 6

Manua, Lie ST-ROT Management (State)

Phone Number: Facelmile:

18961 682-1330 (808) 682-5848

96707

Analytical Results

EP4

40050300

INALAH JOH NO:

CLIENT REPERENCE: POS. 78357 (2/28/08) AUGO4 KAHANA RIII+04 MQANA

Method: 200:12/3881/2892

INALAB NO	Your Dample Description	Sample	Results	Units	Date Submitted	Date Analyzed
20080220099	INDOCK Kanand-Mouns - Li Perne: Ambient Composite Water	UNH	24	901	2/20/2008	3/13/2008
REMURICS	Catholine Water			14.		nur / araugo
20080229009	UNDOCK Kahana/Monna - Lit Pentis: Ambient Composite Water	D(N)	74	ve/C	2/25/2004	3/13/2008
KEMARKS:						
20080230012	UNDOCK Kahana/Mosna - La Perres: Ettuent Composite Wasar	MK	100	46/1	7/29/2008	2/13/2008
MEMARKS:						
HODEOZINET? KEMAPKS	UNDOOK Kahama Moone - LEFFerm. Materia Cookel	Live	13	let.	2/29/2008	2/12/2008
BATCH OCIDA						
BATCH OCIQA Analyte Recov		(% RPD):	T)	fly	etens Blank	eneganole
Analyte Recoy	ery (%): 91 Precision Total Suspended S	-		7	eterr Blank	cospus's
Analyte Recov	ery (%): 91 Precision Total Suspended S Method: 2540 D	-	ed at 103-	7	7	Onte
Analyte Recov	ery (%): 91 Precision Total Suspended S	olids Drie		7	*****	
Analyte Recov	ery (%): 91 Precision Total Suspended S Method: 2540 D	olids Drie	ed at 103-	105°C	Date	Date
Analyte Recov	Mothod: 2540 D Your Sample Description UNDOOK Karpers Misson - LiPpering Ambient	Sample Type	ed at 103-	105°C	Date Supported	Deta Analyzed
SMWW HALAB NO TOBROZERÓN REMARKS;	Mothod: 2540 D Your Sample Description UNDOOK Karpers Misson - LiPpering Ambient	Sample Type	ed at 103-	105°C	Date Supported	Deta Analyzed
SMWW HALAB NO TOBOLERONO REMARKS:	Mothod: 2540 D Your Sample Description UNDOCK Karpers Misson - Lifemer: Ambient Conscale Water	Sample Type LINK	Results	Units mg/L	Date Summitted 2/29/2006	Onte Analyzed 3/3/2008
Analyte Recoy	Mothod: 2540 D Your Sample Description UNDOCK Karpers Misson - Lifemer: Ambient Conscale Water	Sample Type LINK	Results	Units mg/L	Date Summitted 2/29/2006	Onte Analyzed 3/3/2008

Total Recoverable Zinc in Seawater

INALAB, Inc. is an AIHA INLAP ACCREDITED LABORATORY (Accreditation No. 101812) with scope of accreditation including metals, solvents, fiber counts and bulk asbastos. INALAB, Inc. is a participant in the Compressed Air Proficiency Test (CAPT) program.

25 March 2008

Committed Ecocoment: Analytical Meyorf, Rev. 20050019.

Fugs Sal 8

NATIONAL POLLUTANT DISCHARGE ELIMINATION BYSTEM (NPDER) DISCHARGE MONITORING REPORT (DMK)

Form Accresives DAME No. 2049 (IN)

PHINTTEE NAME ASSESS THE ROLE FOR BY NAME & COLOR & DESCRIPTION

NAME: WARISCO LTD

ADDRESS: 81-607 MALAKOLE PID "APOLE), HI 96707

FACILITY: "LIL" PERRIS FLOATING DIFFIDOGX

LOCATION: 31-507 MALAKOLE RD KAPOLES, HE \$6707

1410021785 PERMIT NUMBER

701A DISCHARGE NUMBER

		- 1	accerto	RING	PERCO)	
	YEAR	up	DAY		YEAR	MO	DAY
FROM	08	02	01	10	08	05	31

DAM MARING ZIP CODE: 98707

MINOR

HARDON WORK FRANTING INF BY BOOK GUILTING LOWING

Formers Durthof

No Discharge

PARAMETER		QUANT	TTY OR LOADING	_	q.	IALITY OR CONG	ENTRATION		NO.	PROPORTINGY OF ANNLYSIS	SAMPLE
1,149,021,031	hobsel	VALUE	VALUE	UNITS	VALUE	VALUE	VALUE	UNITE	104		100
рн	SAMPLE MEASUREMENT	-	Twint		8.0	-	9.0			3/3/	
00400 f 0 EMuest Gross	PERMIT REQUIREMENT	Game)	*****		(www.mr.)		(Moximal)	100		CASES.	- W
S = V squade!	SAMPLE MEASUREMENT	\rightarrow	-		-	-	27			3/3/	
DOSDA + D Effects Gross	PERMIT REQUIREMENT	14.3					ing you	NO.	TO SE	Consylet Dayley	500
Couls actionble	MILASUREMENT		-	0.00	-		< 0.1		il-	3/3/	
00545 1 0 Efflored Gross	PERMIT	-	4-192	1		-	CALL MOD	MLE	100	Department	cours
Arminic, total micoversials	SAMPLE MEASUREMENT	3 minu				print	2			2/3/	
00978 1 D Effluent Gross	PERMIT REQUIREMENT	1 - 1 · 11 · 11	Janes .		J. Tiles		EMAIL HAPK	- Net	TELS.	Chics time 1 Observerge	Creation.
Ziec, total recoverable	SAMPLE MEASUREMENT	areas.	1986		-	rette	510			3/3/	
01094 1 6 EPRoper Gross	PERMIT		7.0		_=		TATAME.	igh.	HE C	COMPRE	- Printers
Codming load recoverable	SAMPLE MEASUREMENT	Seemi 1	Table 1	5	-		<5.1		10	3/3/	1.
DY11S 10 EMant Gross	PERMIT REQUIREMENT		1 11 - 14		E ATT	115	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	igt.	J.U	/ Galle	1704
Leed, total recoverable	SAMPLE MEASUREMENT		-	-	-	-	<30	1	1	3/3/	1
D1114 1 C. Efficient Grops	PERMIT REQUIREMENT	77	Mar all	1	理作出	mi Ton	DATE YAND	ugL	3	Crice Pake.	COVERA

NAME TITLE PRINCIPAL EXECUTIVE OFFICER	I could trade purity of two the file descripted of the following was present under my direction or procedure in accordance with a system designed in source that position properly produce you		TIL	EPHONE	- 1	DATE	
	remains the bitter process of the control of the control of the process of protects of the control of the contr	MIGNATURE OF PRINCIPAL EXECUTIVE OFFICER OR					1
TYPED OR PROVIDED		AUTHORIZED AGENT	MAIN SOM	NAMES	TRAN	M2	265

DOMMENTS AND EXPLANATION OF ANY VICEATIONS (Reference of attachements turn

NOTE: 21NC ON 5/19/08@ 590 49/L- Poemof Limit 95

SPA From \$525-1 (Nex 51/80) President military every be seen.

NATIONAL POLLUTANT DISCHARGE ELMINATION SYSTEM (SPEEK) DISCHARGE MEMBERSHIP REPORT (DMR)

ADDRESS: NAME ST-SET WAL-WICE FIDE MARISON LTD

THE WAY THE WAY DE THE STREET SECTION OF THE PROPERTY OF THE P

POCALIDA PAGILITY T.E. PERKUE PLONTAND DISTRICTOR

CAPOCET IN POLAN CASTON TWO DEVIS

FIGSE

78 OS 01

TO OY US 31

DAY

0118010

Daniel Bross

Sper, Light To Constitute

01 81110

Build Geas

STILLET Gross 21901 10

Mark Stone NOTE 10

PERMIT ...

X.

Mercury, bid recoverable

Burnt Goas 915151 U Etharet Gross Direct Disease

10.120

Wallyton, Total Resolverable

Children total recoverable

PARAMETER

PERMIT MUMBER HB0021789

YLDG

DISCHARGE NUMBER

CORNER DIRECTINGS

INC/BOTT DANK WATTHER SILL CODE BELLEL

factor water from all drydod dates in-STORY SHADE

No Dischage

THE STATE OF THE S	NAND	SHISKOL NO VITTAGO		ıtı.	BUYTLY, ON CONCENTRATION	HOLLYLLINE		見言	OF AHALYSIS OF AHALYSIS	BANT
- The	VALUE	WALUE	SUMO	VALUE	BILLINA	AVITA	Story	13		3
MEASUREMENT	ł	Heres	Ĭ	1	Í	629			3/3/	
PERMIT		T. Samuel		Ŧ	- Trans-	Waled or	M	18	1000	THE WAY
THE STANKS	Ĺ	1	Ť	1	. Appendix	1300			3/3)	
THEMSONGER					((L-)	The Table	4			
MEASURGARAT	1	1		ł	-	25			3/3/	
PERMIT						Michael	you.	West of the last		
MEASUREMENT	Ī	1	Ī	THE REAL PROPERTY.	1	AN			3/3/	
PERMIT		The state of the s		The State of		origin-0	ugi.		Disple 3	INTL NCC.
MEASUREMENT		I		-	1	1.17			3/3/	
REGUIREMENT	Wile II			Allens II	15.1	The same	JUN.	1		8,
STABLES THE	l	2,776	Meg	1	ı	1	8		3/3/	

COMMENTS AND EXPLANATION OF ANY VIOLATIONS Bulletines at attended of the
NOTE CESPOROUS SPAJOSIO 1507- BELINT LIMIT 2.5

SOUNTINE OF PRINCIPLE AGENT

Sections.

STAMPS.

THE REAL PROPERTY.

8

E

TEPOHADYE.

DATE

MAMETITLE PRINCIPAL EXECUTIVE OFFICER

A STATE OF THE PROPERTY AND PERSONS ASSESSED.

Carl Victoria

Microsof, Ltd. 91-007 Majakole Road

Phone Number:

EEE1-22a (808)

Facumillo:

Kupolei HI 98707

Analytical Results

INALAB JOB NO:

20080753

CLIENT REFERENCE: UNDOCK STAR OF HONOLULU

	****** Total Recoverab	le Coppe	r in Seaw	ater		
EPA INALAB NO	Method: 200/12 / 220/2 Your Sample Description	Sample Type	Results	Units	Date Submitted	Onia Analyzno
20080505001 REMARKS:	Star of Honolulu - Lil Perris - Ambient Composite Water (As; Cd; Cr; Cu;Pb; Hg; Zn)	UNK	BA	.ug/L	5/2/200H	5/20/2008
20080505004 REMARKS:	Star of Haneloiu - Lil Perris - Effuent Composite Water (Ast Cit; Cit; CutPb; Hg; Zn)	LINE	42	∆g/L	5/2/2008	5/20/2000
20080505009 REMARKS:	Star of Honolulu + Lil Pern's + Metalla Gonutol. (As; Cd; Cr; Cu/Pb; Hg; Zn)	UNK	1.6	myL	5/2/2008	5/29/2009
BPA	###### Total Recoveral Method: 200.12 / 289.1 / 289.2	ble Lead	in Seawa	ber	Date	Date
INALAB NO	Your Sample Description	Туре	Hesults	Units	Submitted	Analyzed
20080505001 HEMARKS	Shar of Honolulu - Lil Perris - Amb ent Composite Water (As; Cd; Cr; Cu;Pb; Hg; Zn)	SWE	¢ 33	UQL	5/2/2008	9/20/2000
20060505004	Star of Honolulu - Lit Perns - Efficient Composite Water (Air, Cd; Cr; Cu:Pb; Ho; Zn)	UNK	< 48	ug/L	5/2/2007	5480/2000
REMARKS1		UNK	4.75	Ug/L	5/2/2008	5/20/2008
REMARKS:	Star of Honolulu - Lif Penris - Metals Control (As; Cd; Cr; Cu; Pb; Hg; Zn)	THE .			30,000	

INALAB, Inc. is an AIHA IHLAP ACCREDITED LABORATORY (Accreditation No. 101812) with scope or accreditation including metals, solvents, fiber counts and bulk asbestos. INALAB, Inc. is a participant in the Compressed Air Proficiency Test (CAPT) program.

Miller Mitcheley
Millerum, UN
91-907 Materials Road

Phone Number: Facsimile: (800) 682-1383

Hapolet 16 96707

Analytical Results

INALAS JOB NO: 20080753

CLIENT REFERENCE: UNDOCK STAR OF HONOLULU

	******* Total Recovers	ble Zinc	in Seawa	ter	******	
EPA INALAB NO	Method: 200.12 / 289.1 / 289.2 Your Sample Description	Sample Type	Results	Units	Date Submitted	Data Analyzed
20000505001	istar of Handluly - Lit Pierris - Ambient Composite Water (As; Cd; Cr; Cu; Pb; Hg; Zn)	UNK	51	ngit	6/2/2008	5/20/2000
REMARKS.						
20080505004	Star of Honolyla - Ul Perris - Effluent Domposite Walter (As, Dd, Cr; Cu;Pb) Hg; Zn)	ONC	8	uşt	5/2/2008	5/20/2008
REMARKS.						
20080605009	Star of Honolulu - Lili Pieros - Metals Cordiol (As; Ed: On: CucPo He: Zh)	LINE	27	MAC	522000	SPECIME
REMARKS	24 (24 (24 24 24)					
Anniyte Recov	mete (%) - 100	(% BPD)	<1	200	ne dairre William bro-	Acceptant Advisory
	******* Total Suspended S		7.73/2	31.10	ntem Blank:	eccoprisi
SMWW	The state of the s	olids Dri	7.73/2	31.10	******	5.0
SMWW	****** Total Suspended S		7.73/2	31.10		Date
	Method: 2540 D	olids Dri	ed at 103-	105°C	Date	-
SMWW INALAE NO	Method: 2540 D Your Sample Description Star of Monotulu - LII Perris - Ambient Composite	Sample Type	ed at 103-	105°C	Date Submitted	Data Analyzec
SAWW INALAH NO 20080505002 REMARKS:	Method: 2540 D Your Sample Description Star of Honolulu - Lil Perris - Ambient Composite Water (TSS) Star of Honolulu - Lil Perris - Effluent Composite	Sample Type	ed at 103-	105°C	Date Submitted	Data Analyzaci
SAWW INALAB NO 20080505002	Method: 2540 D Your Sample Description Star of Honolulu - Lil Perris - Ambient Composite Water (TSS)	Sample Type UNK	Results	-105°C Units	Date Submitted 5/2/2008	Date Analyzes 5/5/2008
SMWW INALAH NO 200H0505002 REMARKS: 200B0505005	Method: 2540 G Your Sample Description Star of Monotule - Lil Perris - Ambient Composite Water (TSS) Star of Honotule - Lil Perris - Efficient Composite Water (TSS)	Sample Type UNK	Results	-105°C Units	Date Submitted 5/2/2008	Date Analyzes 5/5/2008

INALAB, Inc. is an AIHA IHLAP ACCREDITED LABORATORY (Accreditation No. 101812) with scope of accreditation including metals, solvents, fiber counts and bulk asbestos. INALAB, Inc. is a participant in the Compressed Air Proficiency Test (CAPT) program.

Marison, Ltd. Wareson, Ltd. W1-607 Marakola Rosa

Prione Number 1 (809) 682-1532 Faculmile: (800) 882-5548

Kapowi Hi Miroz

Analytical Results

MALAB JOH NO: 20 674

CLIENT REFERENCE: P.O. 879177 - ABC 04 (MINUM) - LYL PERBIS

	****** Total Recoverable	e Coppe	r in Seaw	ater	ANDRE	
EPA INALAB NO	Method: 200 12 / 220 2 Your Sample Description	Sample Type	Results	Units	Cale Submitted	Date Analyzod
20080519062 NEXAROS	LINDUCK MINION - LA Perm - Austrian Composite Water (Acr Cd. Cr. Cu. Fin, Fig. 26)	1,0005	19	ug/l	5/11/2008	\$/23/2006
Lugeo5(9065	UniODOC MATCH - Lit Pensy - Emaint Composition William (Air. Cet. On Cit. Pb., Hig. 20)	1001	190	lest	3/19/2002	Sesque
200609190T0 REMARKS:	UNDCICKMIRO) - Lii Pertii - Multiin Control (Asi Od: Crt Cir; Pb: Hg; Zh)	1900	12	bgt	0/19/2002	5/23/2000
BATCH GG/QA		3/1000			100000	
Avustyna History	Total Recoverat	le Lead	In Seawa		seases	
EPĀ	1015				7.7	Dafa Analyzani
EPA INALAB NO 20080619062	Method 200/12/2301/2502	le Lead	in Seawa	ter	Date	Date
EPA INALAB NO 20080519062 REMARKS: 20080519065	Method 200/13/23/21/25/2 Your Sample Description UNDOCK MIRPOL- LI Peris - Amburi Composite	sample Type	In Seawa	ter Units	Date Submitted	Dafe Analyzen
	Method: 20% (2 / 23% 1 / 25% 2 Vitti Sample Description UNCOCK MIKPOL- Lil Plane - Ambumi Demposite Witter (As: Cd; Cr; Cu; For Hg; Zn) LMOIXER MIKPOL- Lil Plane - Ethioni Console	Sample Type Large	Results	Units Units	Date Bubmilled Servizions	Date Analyzani Srzaczolik

INALAB, Inc. In an AIRA IRLAP ACCREDITED LABORATORY (Accreditation No. 101812) with scope of accreditation including metals, solvents, filler counts and bulk arbivator. INALAB, Inc. is a participant in the Compressed Air Proficiency Test (CAPT) program.

Ein, 6i8 McCaffery Moreous, CM, 91-607 Moseomy Plyes Phone Number: (809) 883-1323 Pacsimile: (809) 680-5848

Napell 98 09707

Analytical Results

MALAD JOB NO:

20080874

CLIENT REVERENCE: P.O. 879177 - ABC-04 (6/19/00) - UL PERRIN

	******* Total Recovera	ble Zinc	in Seawat	er	******	
EPA INALAB NO	Method; 200.12/289.1/289.2 Your Sample Description	flample Type	Results	Units	Date Submitted	Date Analyzed
20080519062 REMARKS	UNDOCK MIKI'OI - LI Perris - Amblent Composite Water (As: Cd; Cr; Cu: Pb; Hg; Zn)	UNK	68	ug/L	5/10/2008	5/23/2006
20080518065 REMARKS:	UNDOCK MITTOI - LE Ponts - Effluent Domponte Water (As; Cd; Cr; Cu; Po; Hg; Zn)	UNK	510	194	5/18/2008	50339ht
ZÓNENS19070 PIEMARIKE	LINE COCK MINUTO) - Lit Pearls - Metalis Control (As. Co Cit, Cuc Pt., Hiz. Zm)	UNIX	+ 4.9	jigt	5/19/000m	5033888
BATCH DO/QA Analyte Recov	Park and the second sec	(% RPD):	-si	3)	ystem Blank: /	locoptable

	******* Total Suspended S	CALLANDE CA	ACCOUNT.	600		
DN BALANI	Method: 2540 D Your Sample Description	Sample Type	Results	Units	Date Submitted	Date Analyzed
20080618061	UNDOCK MIG'OI - Lil Pertis - Ambient Composite Water (TSS)	LENK	4.	mg/L	5/19/2006	9/30/3008
FIEMARIOS:	0.000					
20080519066	UNDOCK MIKEOT - Lil Perris - Efficient Composite Water (785)	UNK	27	mo/L	5/18/2006	57206000
TIEMATIKS:	11007					
BATCH OCIDA	- 73 · · ·					
Analyte Recoin	ery (%): N/A Precision	C4 RPD1: 33		5y	stem Bassic, /	ologially

INALAB, Inc. is an AIHA IHLAP ACCREDITED LABORATORY (Accreditation No. 101812) with scope of accreditation including metals, solvents, fiber counts and bulk asbestos. INALAB, Inc. is a participant in the Compressed Air Profesency Test (CAPT) program.

in the McCalley Manage p.c. 11 and Modeling Name

Pliane Number

(408) 682-1313 (909) 682-5845

Apoint HI 96707

Analytical Results

MALAB JOB NO: 10000011

CLIENT REFERENCE: P.O. \$78240: ABQ18 / APB-09 - Lil Perris (\$/\$7700) - LINDUCK Figur 1

	****** Total Recovera	Die Cobbe	er in Seaw	ater	KARKEAE	
EPA IRALAB NO	Method: 200,12 / 320.2 Your Sample Description	Sample Type	Results	Units	Date Submitted	Date Analyzed
20080527044 ME WANKS	1. Lii Perris - Ambiani Composite Water (As; Cd. C Cu. Pb; Hg. Zh)	UNK	26	ug/L	6/27/2008	6/1/2008
20080527044 REMARKS:	Lis Peris - Ambieni Composite Water (As, Co. (Cur Pir Hg, Zri)	× mp	23	ug/L	5/27/9006	6/3/2506
10000527047	a: Lil Perris - Efficient Composite Water (As; Cd; (Çiz, Pti, Mg; Zn)	t LINK	1200	ug/L	5/27/200B	B/3/2008
DIONOS27052	P: LIFPHENS - METAL CONTROL (AS OE O; Ou. 7hr (ng; Zn)	UNK:	* 03	rail	5/21/0508	6/3/2008
THE STATE OF THE S		or or other	-30	1.4	anna Period / I	-
RATCH OCICA Amalyle Recov	Precisi Total Recover	on (% RPD): able Lead	in Seawa		teriore	Loosphine
	vry (%) 100 Precisi					Date Analyzed
EDA MALAB NO 20030527044	******* Total Recover Method: 200.12/239.1/239.2	able Lead Sumple Type	in Seawa	ter	Date	Date
EDA MALAB NC 20080527044 REMARKS 20180527044	Mothod: 200.127 239.1 / 239.2 Your Sample Description 1. Li Parte - Ambunt Cornecate Water (As. Co. Co.	Sample Type	in Seawa	ter Units	Date Submitted	Date Analyzed
EDA MALABING 20000527044 REMARKS 20100527044 EMARKS	Mothod: 200.12 / 239.1 / 239.2 Your Sample Description 1. Li Plinte - Ambunit Composite Water (As. Co. Co. Ph. No. Zn.)	Sample Type Type	Results	Units Units	Date Submitted 5/27/2004	Date Analyzed 0/02/08
Amilyle Recov	Mothod: 200.12 / 239.1 / 239.2 Your Sample Description 1. Li Partie - Ambuent Composite Water (As. Cd. Co. Po. Hg. Zn.) 1. Li Partis - Ambuent Composite Water (As. Cd. Co. Co. Po. Hg. Zn.) 1. Li Partis - Efficient Composite Water (As. Cd. Cd. Cd. Cd. Po. Hg. Zn.)	Sample Type Type	Results 4 37 4 37	Units Units Upl.	Date Submitted \$27/2005 \$27/2000	Date Analyzed 6/02/008

INALAB, Inc. is an AIHA IHLAP ACCREDITED LABORATORY (Accreditation No. 101812) with scope of accreditation including metals, solvents, fiber counts and bulk asbestos. INALAB, Inc. is a participant in the Compressed Air Proficiency Test (CAPT) program.

28 June 2008

Committed Deciment: Analytical Report. Rev. 20050919

Page 4.cf ft

Min Bid MicCaPery Mineral Ltd Rodd/Ferentian Roots

Pocoe Number (SER) 642 (33) Faceloide: 1801 642 4844

Rapple 111 95707

Analytical Results

INALAB JOS NO. 200

CLIENT REFTRENCE: P.O. 879240: ABQ18 (APR-08 - LII Perris (M27/08) - UNDOCK Tiger 3

	****** Total Recovera	ble Zinc	In Seawat	er	******	
EPVA INALAB NO	Method: 200.12 / 288.1 / 289.2 Your Sample Description	Sample Type	Results	Units	Date Submitted	Date
20080827044 REMARKS	t. Li Pems - Ambient Composite Water (Asj. Cd; Dr. Cir. Por Hg: Zni	LIME	48	Ug/L	5/27/2008	8/0/2008
20080527544 IPMAPKS	1" Lis Plants - Ambient Composite Water (Ab., Cd. Cr. Cer Pla, trg. Zn)	Dur	- 40	upt	5/17/2008	8/5/2008
TOOMDS FOA!	4: LLI Perts - Effluent Composite Water (As: Dr. Cr. Ct. Physique 24)	UNK	490.	tgf.	5/27/2008	8/3/2009
20080527052 (EAAABSE)	IS LIS PROVIDENTED AND THE DESCRIPTION OF THE CONTROL OF THE CONTR	LINE	+ 24	rgt.	s/27/2006	99/2006
BATCH OC/OA Analyte Recov		(% RPD):	s t	Sy	stem Blanki	Acceptable
	******* Total Suspended S	olids Dri	ed at 103-	105°C	******	
SMWW INALAS HO	Mathod: 2540 tz Your Sumple Description	Sample Type	Results	Units	Date Submitted	Date
20080527 04 5 REMARKS	2: Lit Perns - Ambient Composite Water (TSS)	UNK	1.9	mg£	5/17/2008	N/27/008
20080121348 DCMARRY	5: Lil Petris - Stificent Composité Water (T(85)	090	9	mor	5/27/0008	éradade

INALAB, inc. is an AIHA IHLAP ACCREDITED LABORATORY (Accreditation No. 101812) with ecope of excreditation including motals, solvents, fiber counts and bulk asbestos. INALAB, Inc. is a participant in the Compressed Air Proficiency Test (CAPT) program.

19 Auto 2010

Controlled This served. Amalysis of Report, Park 20050079

Page & of &

DOCUMENT ш

MATICINAL POLLUTANT DISICHARGE ELIMINATION INSTEM (MPIGES) DISCHARGE MONITORING REPORT (DMR)

Attend become COMPTHE STREET

Thou I

HAME

MARIDICID LITE

WAPOLE, HI 08707 ADDRESS:

"LL" PERRIG FLOATING BHYDGON. FAULLTY:

LOCATION: 91-807 MALAKOLE KD KAPOLEI, H 16707

+ ■02178B PERMIT HUMBER

002% DISCHARGE NUMBER

		- 1	MONITO	RING	PERIOR		
	YEAR	MO	DAY	10	YEAR	MO	DAY
MOS	08	06	01	TO	08	04	30

DMR MAILING ZIP CODE: 19707 MINISTR

Higher water I wing all arydick alithing awards Esternal Cultail

No Discharge

PARAMETER	(DUANT	DAIDAGI RO YTI		Q.	UALITY OR CON	CENTRATION		NO.	PREGGENICY OF AMPLYSIS	SAMPLE TYPE
- 10.531111.		SULAY	VALUE	UNITS	AVERE	VALUE	VALUE	DNITS			
Chromium, tale) recoverable	SAMPLE MEASUREMENT	5	~		(ume)	tomat	<33	1		2/30	
otits to Effund Great	PERMIT REQUIREMENT	3,100			- 1-1-1-1-1	4 -6 4	TATE TOXE	rigit.	TO!	Contraction	coyajóg
Oopper, (olai recoverable	SAMPLE MEASUREMENT	Same	-		Destet	10000	790			2/30	
Entité 1 č Effuent Gress-	PERMIT REQUIREMENT				3000	5.77	number 1	ogt.	# N	Eng.	DIMM'S
Of and groups	BAMPLE MEASUREMENT	-	_			remen	25			2/50	
95562 1 D E'Bloom Stees	PERMIT REQUIREMENT	1 1 1 1				300	101340	mol.	ETH	Decilient Company	Skuli -
Trisulylun, Total Recoverable	SAMPLE MEASUREMENT	-	- manual		-	(JES-)	NA			2/30	
51516 1 8 Eriumi Gress	PERMIT REQUIREMENT		1 -1 -1 -1		-	V - ""	100-W	.ogt.	0.00	- Choi Por Captaron	Er onede
Mercury: (atel meaverable	SAMPLE MEASUREMENT	-	******				4.1			2/50	
7(90) _ Elicant 6:331	PERMIT REQUIREMENT	1440	THE PARTY OF	·		1	Towns.	ug/L	1	1 co ser.	湖池。
Fkiw	SAMPLE MEASUREMENT	2.776	-	MGD	D-0			-		2/35	
74076 L. Efferni Simes	PERMIT REQUIREMENT	13 / The first	- y - 2"	alele		ौं∷ा हुं = न	The state of	-		yes the	To all

HAMEINYLE PRINCIPAL EXECUTIVE DEFICE	to the state of th		TELE	EPHONE	-	DATE	
	product for the matter action for \$100 days for the \$100 days for product or product or the second of the second or the second o	SIGNATURE OF PRINCIPAL EXECUTIVE OFFICER OR	-				
TYPED OR PRINTED		AUTHORIZED AGENT	MARK SHA	HOMBER	YEAR	MIG	DAY

COMMENTS AND EXPLINATION OF ANY VIBLATIONS (Trafference #1 alternments have)

EPA Form (2003-1 (RevOtted) Pyrvience william (may be pared.

NATIONAL POLLLITANT DWWHARGE ELIMINATION BY 57 EM INPOEST DISCHARGE MONITORING REPORT (DMR)

THE RESERVE

Page 6

I FORTIEE HAMEIADORES I AND THE WARM LOOK OF A PARTY

NAME:

MARISCO LTD

ADDRESS: D) SET MALAKOLE RO

KAPOLEI, HI BUTOT

FACILITY LOGATION: 91-807 MALAKOLE RIT MAPQLES, HI 99707

"LL" PERRIS FLOATING DITYOGON;

110021760 PERMIT NUMBER

002A DISCHARGE NUMBER

	MONITORING PERIOD									
	YEAR	MO	YAG	7.1	YEAR	MO	DAY			
FROM	08	00	01	TO	UV	00	30			

DAR MALLING ZIP CODE: 90701 MARCH

Harton water flowing all drydeck during lawering Expresi Dathall

No Discharge

PARAMETER		QUANT	TY OR LOADING		Q	JALITY DR CON	CENTRATION		MO, EX	PARECULARLY CO. AMALYSIS.	SAMPLE
Production		VALUE	VALUE	шита	VALUE	OALUE	VALUE	DWITS			1000
pil	SAMPLE MEASUREMENT		hone		8.03	-	8.03			2/50	
00400 1 0 Effect Gross	PERMIT REQUIREMENT		- Interes		- WHINDHIE		noxii ex	50	-10	AST IN	n PAR :
Status, lated suppergrand	SAMPLE MEASUREMENT)-mind		7000	****	8.8			2/20	
00520 1 C Effuort Gross	PERMIT REQUIREMENT		T T		of the day		mill were	PEL	EV.	Disprarque	CHARC
Gelint, saidaubja	SAMPLE MEASUREMENT	House	-		party.	tunic	201			0/30	
00545 1 0 Efformi Gross	PERMIT REQUIREMENT		17.3		2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Berne	184.45	rik	L - L	Ones Har PRESIDENCE	1.00
Americ, Ideal recoverable	SAMPLE MEASUREMENT		MINH		Heper	1000	2.6			2/50	
60076 \ n Effluent Cross	PERMIT REQUIREMENT		riente.			P. T. W.	white we	1971	Z,	Endand.	con-
Kling hild pregvopusio	MEASUREMENT		eterri.		Appelle	-	200			2/30	
01094 1 D Effluent Getter	PERMIT REDUKEMENT		24190	-		477	TA) THE VIV	ugh	24	Captage .	agurLs
Cedmium lines recoverable	MEASUREMENT	••••) mmr	-	47			2/30	
Citato 1 0 Citato Grass	PERMIT	- """	Harris Committee		10 302.571	1	STANDT MK-	UNE		(Edwards)	JUDAN -
Lead, (clairegoverable	SAMPLE MEASUREMENT	-	Shered		1 minus	1 (44)	< 34			2/30	
01714 10 EMushi Grass	PERMIT REQUIREMENT	right and the	1984			100	- W. 7 76	MAL		- (1200 to 1200 to 120	COMPLE

LANSTRILE PRINCIPAL EXECUTIVE OFFICES			TIES.	EMIONE		DATE	
		SIGNATURE OF PRINCIPAL EXECUTIVE OFFICER OF			100		
TYPED OR FRIVIED	PARTIES.	AUTHORITEO AGENT	MINA Colle	+ McIlloung	YMAR	Mb	DAY

EXMANDERS AND EXPLANATION OF ANY VIDLATIONS (Reference all attachments here)

Air ton **McCaffery** Mariano 640. \$1-007 Membran Road

Phone Humber Facelmille

(604) 682-1331 (600) 587-5848

Analytical Results

INALAU JOB NO:

20080952

CLIENT REFERENCE: A60-02, P.O. #79316 (6/2/68): UNDOCK - WILD THING

	****** Total Recoverable	e aubbo	I III Oper	224004	****	
INALAS NO	Method: 200 12 / 220.2 Your Sample Description	Sample Type	Results	Delta	Date Submitted	Date
2008000000016	LIL PERRIS Composite Water - AMBIENT (As, Ca) Cr. Co. Pix Hg. 2/1)	LIAK	- 17	HO/L	6/3/08	6/23/08
REMARKS						
##0EARD###	LIL PERAITI Democrate Water - EFFLUENT (As. Cd. Cr. Cd. Pb; Hg. Zo)	YOM	390	up.	ersine.	6/23/08
PENNANNS						
500kp803024	LIC PERIOS: Compusite Water - METALS CONTROL UAS: Cit. Cr. Cor. Pb; Hg; ZA)	UNK	1.2	101	60/0/0	6/25708
REMAINS.	2000					
BATCH GC/Q/ Analyte Recov		(% RPD):	*1	54	utum Blank.	Acceptable
Analyte Recov	Precision Total Recoverate				etem Blank.	Acceptable
	ery (%): 100 Precision					Date
Analyte Recov	Method 200,12/239,11299.2 Your Sample Description LIL PERRIS Composite Water - AMBIENT (As) Co.	sample	In Seawa	ter	pre-	Date
Analyte Recovers to the Recove	Method 200,12/239,11299.2 Your Sample Description	Simple Type	In Seawa	ter _{Units}	Date Submitted	Date Analyzed
Analyte Recov	Method: 200,12/230,11230.2 Your Sample Description LIL PERRIS Composite Water - AMBIENT (As) Cd. Cr. Cv. Pb. Hg; Zn).	Simple Type	In Seawa	ter _{Units}	Date Submitted	Date Analyzed
Analyte Recover to the Control of th	Method: 200,12/230,112002 Your Sample Description LIL PERRIS Composite Water - AMBIENT (As) Cd. Cr. Cv. Fb. Hg. Zn).	Simple Type UNK	In Seawa Heavits	ter Units	Date Submitted 6/2/08	Date Analyzes 6/23/08
Analyte Recover LinaLAB NO 20080603019 REMARKS 20080803019	Method: 200,12/230,11230.2 Your Sample Description LIL PERRIS Composite Water - AMBIENT (As) Cd. Cr. Cv. Pb. Hg; Zn).	Simple Type UNK	In Seawa Heavits	ter Units	Date Submitted 6/2/08	Date Analyzes 6/23/08
Analyte Recover the Constitution of the Consti	Method 200,12/239,11290.2 Your Sample Description LIL PERRIS Composite Water - AMBIENT (As) Co. Co. Pb. Hg; Zn) LIL PERRIS Composite water - EFFLUENT (As, Cd. Cr. Cv. Pb. Hg; Zn) UL PERRIS: Composite Water - METALS CONTROL	Simple Type UNK	In Seawa Headts	Units Units	Date Submitted 6/2/06 4/3/06	Date Analyzasi 6/22/08
Analyte Recover to the Control of th	Method 200,12/239,11290.2 Method 200,12/239,11290.2 Your Sample Description LIL PERRIS Composite Whiter - AMBIENT (As) Cell Cr. Cv. Fb; Hg; Zn) LIL PERRIS Composite water EFFLUENT (As, Cell Cr. Cv. Fe; Hg; Zn) UL PERRIS Composite Water - METALS CONTROL (As) Cir Cr. Cv. Fe; Hg; Zn)	Simple Type UNK	In Seawa Headts	Units Units	Date Submitted 6/2/06 4/3/06	Dets Analyzed 6/22/08

INALAB, Inc. is an AIRA IHLAP ACCREDITED LABORATORY (Accreditation No. 101812) with scope of accreditation including metals, solvents, liber counts and bulk asbestos. INALAB, Inc. is a participant in the Compressed Air Proficiency Test (CAPT) program.

F July 2008

Commiss Discovery Adaptive Report Pres Postionts

Page And S

Ne Bill McCaffery Names 200 (1) 607 Malande Road

Phone Member: Facilities (8008) 882-1333 (808) 882-5648

Cappia Hi 05707

Analytical Results

WATER TOR HO THORDS

CLIMIT REFERENCE: ABO-03, F.O. 179316 (MONN), UNDOCK - WILD THING

Total Recoveral	ole Zinc	in Seawa	er	****	
Method: 250 12 / 289 1 / 269 3 Year Sample Description	Sample	Remilis	Units	Date Submitted	Date Analyze i
LIL PERRIS: Companie Water - AMBLENT (As. Cu. Cr. Cu. Po. Hg. Zn)	UNIC	16.51	ngl	636	8/25/dd
C. Schrieber					
LIL PERRIS Composite Water - ETT LIJENT (As. Of Cit Co. Po. +); Ziri	All and	900	196	6/3/04	0.23/50
III. PERRIS: Composite Water - METALS CONTROL	YIME	4.5	ngá	6/2/06	6/23/06
Marie and a state of the state					
ery (%) 100 Precision	("L RPD)	et	5	stem Blank	кылдына
****** Total Suspended So	atids Dri	ed at 103-	105°C	******	
Method, Edworn					13.70
Your Sample Description	Type	Results	Ustra.	Submitted	Analyzed
LIL PERRIS Composite Water - AMBIENT (TSS)	Date	2.4	ma/l	8/3/00	0/5/01
	LIL PERRIS: Composite Water - AMBILINT (As. CL. Cr. Cu. Pb. Hg. Zn) LIL PERRIS: Composite Water - ET (J/Ent.) (As. Cl. Cr. Cu. Fc En) LIL PERRIS: Composite Water - METALS CONTROL (As. Cd; Cr. Cu, Pb. Hg. Zn) Processor Total Suspended Sc. Method, 1140 (1) Your Sample Description	LIL PERRIS: Composite Water - AMBILINT (As. Cd. UNIX. Cr. Cu. Pb., Hg. Zn.) LIL PERRIS: Composite Water - ET LIZENT (As. Cd. UNIX. Cd. Cd. Pb., Hg. Zn.) LIL PERRIS: Composite Water - METALS CONTROL. UNIX. (As. Cd. Cr., Cb., Pb. Hg. Zn.) LIL PERRIS: Composite Water - METALS CONTROL. UNIX. (As. Cd. Cr., Cb., Pb. Hg. Zn.) Processor (* RPD.) Line Sample Description Total Suspended Solids Driving Sample Description Type	Type Results Lil PERRIS: Composite Water - AMBIENT (As. Cit UNIX Cri Cu Pb, Hg, Zn) Lil PERRIS: Composite Water - ETT (VERT (As. Cit UNIX Cri Cu Pb = Zn) Lil PERRIS: Composite Water - METALS CONTROL UNIX (As. Cd; Cr. Cu, Pb' Hg, Zn) Processor (* RPD) Total Suspended Solids Dried at 103- Method, 1590 (1) Your Sample Description Type Results	LIL PERRIS Composite Water - AMBILINT (As. Ct. UNIX. 1911 1911 1911 1911 1911 1911 1911 19	Total Suspended Solids Dried at 103-105°C ******** Very Sample Description Sample Description Date Type Results Unit Submitted Date Total Suspended Solids Dried at 103-105°C ******** Method: 1140 ft View Sample Description Type Results Unit Submitted

INALAS, Inc. is an AIHA IHLAP ACCREDITED LABORATORY (Accreditation No. 101812) with scope of accordination including metals, solvents, fiber counts and bulk asbestos. INALAS, Inc. is a participant in the Compressed Air Proficiency Test (CAPT) program.

7 Juny 2008

Page 5 of 6

M. IS MICOTON Marine UK ST-OTT Marinda Road

Face Imite: (6

(608) 682-1881 (608) 682-5846

Kapole III 96707

Analytical Results

MALAG JOB NO:

20081008

CLIENT REFERENCE: P.O. #79394; ABU-04, UNDOCK JIMMY SMITH (0/10/00)

	******* Total Recoveral	ole Coppe	er in Seaw	ater	*****	
EPA INALAH NO	Method: 200.12 / 220.2 Your Sample Description	Semple Type	Results	Units	Date Submitted	Date Analyzeu
PEMAROS	1 - UnDock TUG Jimmy Smith: Lil Parms - Ambient Compositie Visiter - As; Cd; Cr; Cu; Pb; Hg; Zir	UNR	10	ug/L	8/10/2008	6/23/2008
20080670002 REMARKE	1 - UniDock TUG Jammy Smith: Lik Perins - Amalent Composite Water - Asi, Cd, Ch, Cu, Po, Hg, Br	DUP	18	upl	8110/2006	6/27/0006
20080619005 REMARKS	4 - UniQuok TUG Jimmy Smarr. Lil Plente - Effluent Composite Water - As, Cd; Cr; Cu; Pb, Hg; Zr	UWK	470	igh	6/10/2009	663/5009
Z0G804100G3 REMARKS	4 - UnDoor TUG Jerroy South 1 - Punz - Emilian Composite Water - Ast Cot Cr, Cut Pb; Frp Zn	DIFF	540	rigit.	6/10/2006	8030008
20060611016 REMARKS	9 - UnDoos TUG Jimmy Smith: La Perm - Membr Control - As; Cd; Cr; Cu; Pb; Hg; Zn	UNK	× 15	og/L	6/10/2006	8/2/2/2008
BATCH GC/QA Analyte Recov		n (% RPD):	q	Sy	stam Blank: /	Acmeptable

INALAB, Inc. is an AIHA IHLAP ACCREDITED LABORATORY (Accreditation No. 101812) with scope of accreditation including metals, solvents, fiber counts and bulk asbestos. INALAB, Inc. is a participant in the Compressed Air Proficiency Test (CAPT) program.

Mr. Bill McCaffey Manusca Ltd: 91-807 Manuscan House

Phone Number: 1906) 605-5333 Facsimile: (656) 665-5333

Kappai HI 96707

Analytical Results

DH BOL BAJAM

20081006

CLIDAY REFERENCE: P.O. 679394; ABU-C4, UNDOCK JIMMY SMITH (0/16/00)

	****** Total Recovera	ple read	in Seawa	ter	******	
EPA. INALAB NO	Method: 200.12 / 239.1 / 239.2 Your Sample Description	Sample Type	Results	Units	Date Submitten	Date Analyzad
20080010002	1 - UnDock TUG Jimmy Smith: Lit Frems - Ambient Compoune Water - As: Cd; Cr; Cu) Pb; Hg; Zn	UNK	₹ 39	HD/L	N 10/2008	8722/2008
REMARKS:						
\$6000 to 1000¥	I - UniCock TUG Jimmy Smith: LI Peris - Amolent Composite Water - As; Cd; Cr; Cu; Po: Hg; Zn	DOB	e 38	NO.	5/10/2008	6/23/2505
REMARKS						
70000510005	A - LinCook TL/G Jimmy Smith: Lil Penis - Effluent Composite Water - Art Cd; Cr; Cu; Pir; Hr; Zn	laws:	< 34	ogt.	Q10/2008	953/2000
REMARKS.						
20080010010	8 - UnDook TUG Jimmy Smith: Lit Paris - Matala Control - As: Cd: Cr: Cu; Pb: Ng: Zn	LINK	4.51	igt.	25.L0/3008	6/25/20/W
MEMARKS						
BATCH QC/Q/						
militarium in perminen						
Analyte Recov		r (% RPD):	<1	\$y	stem Blank:	Acceptable
					stom Blank	Acceptable
	ery (%) 01 Precision	ble Zinc			******	
Analyte Recov	ery (%) 91 Precision ******* Total Recovera					Date Ansiyzed
Analyle Recov	Method: 200.12 / 289.4 / 289.2 Your Sample Description 1 - LinCook Tufg Jimmy Smith: Lil Perma - Amplent	ble Zinc	in Seawat	ter	Date	Date
Analyte Recov	Method: 200.12 / 289.4 / 289.9 Your Sample Description	ble Zinc	in Seawat	ler Units	Date Submitted	Date Analyzed
Analyte Recov	Method: 200.12 / 289.4 / 289.2 Your Sample Description 1 - Lindleck TUG Jimmy Smith: Lil Peri a - Ambient Composite Water - As; Cd; Cr. Cv; Pt; Hg. Zn 1 - UnDook TUG Jimmy Smith: Lil Peri a - Ambient Composite Water - As; Cd; Cr. Cv; Pt; Hg. Zn	ble Zinc	in Seawat	ler Units	Date Submitted	Date Analyzed
Analyte Recov	Method: 200.12 / 289.4 / 289.2 Your Sample Description 1 - LinDock TUG Jimmy Smith: Lil Peris - Ambient Composite Water - As; Cd; Cr, Cv; Pt; Hg. Zn	Sample Type	In Seawat	Units and	Date Submitted 8/10/2008	Date Analyzed 6/21/2008
Analyté Recov	Method: 200.12 / 289.4 / 289.9 Your Sample Description 1 - LinCook TUG Jimmy Smith: Lil Peri a Aunthent Composite Water - As: Cd; Cr; Cv; Pb; Hz; Ze 1 - UnDook TUG Jimmy Smith: Lil Peri a Aunthent Composite Water - As: Cd; Cr; Cv; Pb; Hz; Ze 4 - UnDook TUG Jimmy Smith: Lil Peris - Aunthent Composite Water - As: Cd; Cr; Cu; Pb; Hz; Ze	Sample Type	In Seawat	Units and	Date Submitted 8/10/2008	Date Analyzed 6/21/2008
Analyte Recov	Method: 200.12 / 289.4 / 289.2 Your Sample Description 1 - LinClock Tulis Jimmy Smith: Lil Peri a - Autoleni Composite Water - As; Cd; Cr; Cv; Pt; Hz; Ze 1 - UnDook Tulis Jimmy Smith: Lil Peri a - Autoleni Composite Water - As; Cd; Cr; Cv; Pt; Hz; Ze 1 - UnDook Tulis Jimmy Smith: Lil Peri a - Autoleni Composite Water - As; Cd; Cr; Cu; Pt; Hz; Ze	Sample Type UMK	Results	Units units	Date Submitted 8/10/2008	Date Analyzed 6/21/2008
Analyte Recov	Method: 200.12 / 289.4 / 289.2 Your Sample Description 1 - Lindleck TUG Jimmy Smith: Lil Peris - Ambient Composite Water - As. Cd; Cr. Cv; Pb; Hg. Zn 1 - UnDock TUG Jimmy Smith: Lil Peris - Amount Composite Water - As. Cd; Cr. Cu; Pb; Hg. Zn 4 - UnDock TUG Jimmy Smith: Lil Peris - Equal Longosite Water - As. Cd; Cr. Cu; Pb; Hg. Zn 3 - UnDock TUG Jimmy Smith: Lil Peris - Equal Longosite Water - As. Cd; Cr. Cu; Pb; Hg. Zn	Sample Type UMK	Results	Units units	Date Submitted 8/10/2008	Date Analyzed 6/21/2008
Analyte Recov	Method: 200, 12 / 289.4 / 289.2 Your Sample Description 1 - LinDock TUG Jimmy Smith: Lil Perra - Ambeni Composite Water - As. Cd; Cr. Cv; Pb, Hg. Ze 1 - UnDock TUG Jimmy Smith: Lil Perra - Ambeni Composite Water - As. Cd; Cr. Cv; Pb, Hg. Ze 4 - UnDock TUG Serry Smith: Lil Perra - Equal Londonse Water - As. Cd; Cr. Cu; Pb, Hg. Ze 4 - UnDock TUG Serry Smith: Lil Perra - Equal Londonse Water - As. Cd; Cr. Cu; Pb, Hg. Ze	Sample Type UNK	Results 52	Units wat	Date Submitted 8/10/2008 4/10/2008	Date Analyzed 6/23/2006 SQUATORS SQUATORS
Analyte Recov IJPA INALAB NO 20080910002 HEAWIKS: 20080810002 REAMPIKE 20080610005	******** Total Recovera Method: 200.12 / 289.1 / 289.2 Your Sample Description 1 - LinCock Tug Jimmy Smith: Lil Perus - Autoleni Composite Water - As: Cd; Cr; Cv; Pb; Hg; Ze 1 - UnDock Tug Jimmy Smith: Lil Perus - Autoleni Composite Water - As: Cd; Cr; Cu; Pb; Hg; Ze 4 - UnDock Tug Jimmy Smith: Lil Perus - Equation Composite Water - As: Cd; Cr; Cu; Pb; Hg; Ze 4 - UnDock Tug Jimmy Smith: Lil Perus - Equation Composite Water - As: Cd; Cr; Cu; Pb; Hg; Zn 5 - UnDock Tug Jimmy Smith: Lil Perus - Metals Coribrol - As: Cd; Cr; Cu; Pb; Hg; Zn	Sample Type UNK	Results 52	Units wat	Date Submitted 8/10/2008 4/10/2008	Date Analyzed 6/23/2006 SQUATORS SQUATORS

INALAB, Inc. is an AIHA IHLAP ACCREDITED LABORATORY (Accreditation No. 101812) with scope of eccreditation including metals, solvents, fiber counts and bulk asbestos. INALAB, Inc. is a participant in the Compressed Air Proficiency Test (CAPT) program.

Million MCSTary Names (12

TO MEDI CONTRACTOR RESIDEN

Phone Number: Passimille:

(B)(8) 882 1888 (B)(8) 882 1888

Spoile H 65707

Analytical Results

INAL AU JOB NO: 20021108

ELIENT REFERENCE: ABW-94, P.O. 179501: MNDOCK TUG KOKHA - (1/20/08)

_	+xxxxx Total Recoverable	e Coppe	er in Seaw	ater	*****	
EPA IHALAH IID	Method: 200 12 / 220.2 You Sample Description	Sample Type	meste	Union	Date Subminer	Claim Analytesi
Z0080621001	UnDrock Tog Kakua: Lii Pemia - AMBIENT Composite Water (As: Cd: Cr. Cu. Pb; Hg; Zn)	1,000	> 7,8	1/0/1	9/23/2008	7/10/GOLM
ZOODGEZJÓRY REMARKS	United Top Action: LE Perma - AMBIENT Companies Water (As Cq; Cr; Cu, Pb; Ing; zn)	DIP	1.24	legi.	60/3/2068	7/(1/4)
PROBLEMAN AND THE	UrCord Tug Notice (J. Pierts - IIV Cutent Comment Water (As. Co. Cr. Cis. Pt. Hg. Zh)	Less.	760	MPL	BIZ\$0000	7/10/1
20080022000	UnDoor Tug Kalture Lil Peris - METALS CONTROL IAI: Cit Cr Co: Po. H., 201	LINK	< 0.a	upt.	6/25/2008	2/40/3000
AULLISTA RECES	very (%): 100 Precision	CA RPD)	41	41	estem Blank	Acceptants.
		100			X vol	-
EPA WALAR WIL	Method: 200 12 / 238,1 / 238 2	le Lead	in Seawa	ter	Date .	Date
IOOSOBZJOON	Total Recoverab	le Load			******	
10050823601 REMARKS 20080623601	Method: 200.12 / 239,1 / 239.2 rour sample Description	Sampla Type	in Seawa	ter	Date Submitted	Date Analysed
ICOSOBIJECT REMARKS REMARKS REMARKS REMARKS	Method: 200 12 / 239,1 / 239 2 Your Sample Description LinDoor Tug Kohar Lif Pene - ANBIENT Composite Water (Ast Cd. Or Gui Pb; Hg; Zn) UADoo: Tug Kohas Lif Ferrs - ANBIENT Composite UADoor Tug Kohas Lif Ferrs - ANBIENT Composite	Sampla Type	in Seawa	ter	Date Submitted 503/3008	Date Arelyseu 7/10 (5):00
EPA INALAR IIII IGOSOBZIGOT REMARKS 20080823001 REMARKS 20080823004 REMARKS	Method: 200 12 / 239,1 / 239.2 Your Sample Description Limbesh Tug Kokus: Li Perre - ANBIENT Composite Water (As: Cd, Cr: Gui Pb; Hg; Zn) UnDock Tug Kokus: Li Perre - ANBIENT Composite Water (As: Cd; Cc; Cu; Pb; Hg; Zn) Li-Dock Tug Kokus: Li Perre - 8FFUJENT	Sample Type Unit	Results	Minite well	Date Submitted B23-2008	Date Analyses 7/10/2008

INALAB, Inc. is an AIHA IHLAP ACCREDITED LABORATORY (Accreditation No. 101612) Wiln acops of excreditation including metals, solvents, fiber counts and bulk aebostos. INALAB, Inc. is a participant in the Compresses Air Proficiency Test (CAPT) program.

18 July 2019

Communication of the Property of the Property

Page 4 III N

10 EW

THAT DO NOT THE THE

/ PERSELINA STATE BANG/0.1/40.

Mansag Litt.

314007 Making Robit

Phone Number: Facsimile: (808) 683-1371 (808) 682-5841

Kapeler III S6767

Analytical Results

MALAB JOS NO 20081101

CLIENT REFERENCE: ABW-04, P.O. W70001: UNDOCK TUG KOKUA - (6)20(06)

EP# (NALAB NO	Method: 200 t2 / 28x t / 289 2 Your Sample Description	Sample Type	Results	Unite	Date Sub-milled	Date Armtyžini
20030523001	Unbook Tue Kokus: Lil Pens - AMBIENT Composite Name (As: Car Car Du Pb. Hg. Zn)	UMK	31	LOL	8/5/9/5009	7/10/2006
HEMARKS	3. 3.63.2 (4.36					
20080623001	UnDock Tug Kokuli. Ul Perris - AMBIENT Composite Wasse (Air Co. Cr. Cu; Po. Hg. Zo.)	DUP	91	Agus	NOOTH TOO	7/10/2008
REMARKS						
20080623004	UnDoor Tug Konus Lil Penig - EFFLLIENT Composite Water (Ar. Cit. Dr. Cu. Po. Hg. Zv)	USK	980	101	9700006	y/40/2006
REMARKS						
20080623009	UnDock Tug Kokuar LB Panta - METALB CONTROL (At. Cd. Cr. Cu. Pb. Hu, Zn)	UNK	4.82	Ngu.	6/33/5009	7/10/2000
		_	_	_	_	
REMATIKS BATCH OCICA Acutata Facco	my (%) 100 Precision		+1 ed at 103-	-T-55	Norm (Mana: /	Acceptable
BATCH OCICA Analyte Recor	****** Total Suspended So		7.7.1	-T-55	******	
BATCH GOIGE Acade to Record	my (%) 100 Precision		7.7.1	-T-55		Date Analysed
BATCH OCICA ACMINI PROCE SMINW INALAB NO	Method: 2540 0	olids Dri	ed at 103-	105°C	Date	Date
SMWW INALAB NO 20080923407	Method: 2540 D Your Sample Description UnDoct Top Kinner: Li Pers - AUBIENT Companies	Sample Type	ed at 103-	105°C	Date Submitted	Date Analyzad
BATCH OCICA Analyte Recor	Method: 2540 D Your Sample Description UnDoct Top Kinner: Li Pers - AUBIENT Companies	Sample Type	ed at 103-	105°C	Date Submitted	Date Analyzad
SMWW INALAB NO 20080933607 FIERARIAS 20080633802	Method: 2540 D Your Sample Description UnDoch Tug Konani: Lii Perina - AMBIENT Companie UnDoch Tug Konani: Lii Perina - AMBIENT Companie UnDoch Tug Konani: Lii Perina - AMBIENT Companie	Sample Type	Results	-105°C	Date Submitted	Date Analysed 695/2008
SAWW INALAS NO 20080653467	Method: 2540 D Your Sample Description UnDoch Tug Konani: Lii Perina - AMBIENT Companie UnDoch Tug Konani: Lii Perina - AMBIENT Companie UnDoch Tug Konani: Lii Perina - AMBIENT Companie	Sample Type	Results	-105°C	Date Submitted	Date Analysed 695/2008

INALAB, Inc. is an AIRA IHLAP ACCREDITED LABORATORY (Accreditation No. 101812) with scope of accreditation including metals, solvents, fiber counts and bulk asbestos. INALAB, Inc. is a participant in the Compressed Air Proficiency Test (CAPT) program.

TS JULY \$168 Controlled Doyument: Analytical Report, Plan 20050919

Page 5 of 8

ATTACHMENT C

If was observed in the dry dock cycling log that a cycling event occurred on August 22, 2008. Part A 1 a requires the Discharger to conduct monitoring during each dry dock cycle. The dry dock cycling log does state that monitoring occurred at the time of the cycling, however a copy of the analytical data for this monitoring event was not available for review on the date of the inspection. The Facility representative stated that a copy of the analytical data could be retrieved from the laboratory if necessary.

1	Action / Vessel Dock YC-1485 Tug Nunui	Scheduled Eyele Time 8:30	Sister fine	Type Vessel Bacce Tug	No Samples Required
8 22 05	MUDOCK YC-1485 Tug Nunui	8,00	930	BARYE.	AMB'- 815
8-25-61	Dock K-O-K	800	४१५	UH Research	No Sample
11-18-08	UNDOCK K-0-12	1300	1300	UH Pesearl	AMB-1245 EFF 1310
11-24-08	DOCK 10-757 40-940	11:00	11:00	BARges	No SAMPIS Regum
Party of the state					
	1.7				
			1 1 - 1 - 1 - 1		

ATTACHMENT D

Marisco's Best Management Practices Plan

MARISCO, LTD.

BEST MANAGEMENT PRACTICE (BMP) PLAN

NPDES PERMIT No. HI 0021786

OCTOBER 2002 (REVISION 3)

Chapter 1. Introduction

L Purpose of HMP Plan.

U. S. Environmental Protection Agency (EPA) and State of Hawai, Department of Hearth permitted (Attachment 1) Marisco, Ltd. to discharge barbor water flowing off the dry dock after a lifting and towering cycle, storm water month from the dry-dock area and time-based operations. Marisco, Ltd. has applied for "Non-Contact Cooling Water Discharge" permit, this permit will allow Marisco to discharge cooling water from vessels in dry dock. (attachment 4) Marisco will subrint a monthly report to EPA and Clean Water Branch, State Department of Health according to the permit requirements and implement a Best Management Practice Plan. The purpose of the BMP plan is to reduce the amount the pollutants and potential harards to the minimum through engineering, administrative controls in order to protect ambient water quality. The permit covers both the dry-dock area in well as the land base operations around the dry-dock, excluding, my potential pollutants that past come from either outdoor activities or atmospheric deposits, for which we have no control over and/or or directly responsible.

40 CFR and State Of Hawaii "Standard NPDES Permit Conditions" require all NPDES permittees to submit a HMP plan. The plan shall be kept on the premises at the office of the Environmental Compliance Manager

IL Implementation Committee

The permit orquires the implementation of the BMP plan in controlling the discharge pollutarts from the permitted area. Marisco, Ltd. has formed a standing committee that will oversee the implementation of the plan. The committee will be led by Operation Manager and also include Administrative Manager Environmental Compliance Manager, Surety Officer and general foreman from each department.

III. lipdating the BMP Plan.



Marisco Ltd, will always stove for a Best Management Plan that is most able to reduce potential policition. EPA and State Department of Health will be promptly notified at any activity change that requires an alternation of our BMP Plan.



Chapter 4. Steps to Reduce Pollution - Best Management Practice

Marinot Ltd. proposes the following minimum and controls to accomplish best management practice as required by the permit to "address all specific means of controlling the discharge of pollutums from the Marinoo, Ltd." All dry dock area shall always be kept in a class and orderly manner, which has been and will always be the baseline measure for pollution prevention. More specifically, the following areas are specially addressed:

Probibition of Non-Storm Water Discharge

- The pennis only authorizes Mariaco Ltd. to discharge barbon water flowing oil the dry dock after a minimum of lowering cycle as well as storm water most! from the dry-dock area and land-based operations. Non-storm water such as brige and ballant water, unitary servage from valued attends overeign to be permit. Therefore, non-storm water shall be transferred directly to a holding track or vacuum track to addition, steam cleaning will not be performed on the dry dock and trained operators shall only perform tank pumping. All hoses used for transferring liquids will be hydro-coated annually.
- The disposal of M.E. heat exchanger hydro-test water and other wastewater generated while the
 vessel is in dry-thick into the vessel or dry dock's biline and/or ballast tank is prohibited.
 Wastewater not covered unite this, but NPDES parent, including but not limited to low pressure
 classing water, after-bigh pressure water blassing. M.E. best exchanger bydro-test water, hote
 hydro-test water will be properly disposed and will not be discharged into Barbers point Harbor.

Non-Cortnet Cooling Water Direharge

- Marison, Ltd. is permitted to discharge 'non-contact' cooling water from vestels when they are in dry-dock. The discharge of any non-contact cooling water will be discharged at any of the four discharge located on port or starboard sides of the dry-dock. Any vested that will have my type of non-contact cooling discharge, will comply to the permit requirements (attachment 04)
- The losses used for overboard outcharge consecutors will be charged and secured to make that
 twice of them leak or allow the facturge to come into contact with the dry-dock. However hard
 pipe will be utilized to not the "non-contact cooling wans disclosure" to one of any discharge
 however, designated on our NPDES permit.

Low -pressure/Low volume cleaning

- Low-pressure cleaning is used to remove marine growth. Uspidds from the low-pressure/lowvolume cleaning wash shall be committed within the day-dock postoon deck to prevent the discharge from Soving off dry-dock. All liquids that are generated by the 'low-pressure/lowvolume' cleaning will be continued in the dry-dock postoon aret.
- The postuous or deck arm of the dry dock has a 4" berm on the foreword and after enth, this will contain any and all liquids that are a generated by this chaning procedure in addition "Marks of shall pump and vacuum up liquids generated from this process". The discharge will be "jumped" into temporary bolding tanks (poly or steel tanks), where it will be held, tested and want to a pormitted water treatment facility for proper disposal. Any remaining the debris will be broom a wept and vacuumed and placed in covered containers ("imper sucks") for disposal. Therefore, in this case, improving and maintaining the dry-dock clean and in order is the best management practice to reduce potential publishes sources.
- There are no additives or chemicals that are added to the water at any time, the SPCC and NACE olerating standards do not allow for any 'chemical' additive to be applied.

The amount or volume of liquid that is governed depends on the size and square foreign of the
result that must up be element, and the condition of the underwater bull it will. A flow rate of 4
guillons per minute and 4,000 P31, we will propertie less than 2,000 gallons per day.

Chra-High Pressure Water Blasting

- All liquids that are constructed by the 'ultra-bigh pressure' cleaning will be contained in the dry-dock population urns. The posterior or dock gree of the dry dock has a 4" been on the foreword and after ends, that will contain any and all liquids that area personned by this cleaning procedure.
- Ultra-high water observing will be contained in the dry-dock area beam and pumped into temporary holding tanks (poly or steel 'frac' tanks), where it will be hold, tested and sent in a permitted water treatment facility (Unitek or Phillip Services) for proper disposal. Any remaining debrit will be broom swept and vacaumed and placed in covered containers ("auper racks") for disposal. I herefore, in this case, improving and maintaining the dry-dock in a clean and orderly memor is the best sumagnment practice to reduce potential pollution sources.
- There are no additives of chemicals that are added to the verter of any time, the SPCU and NACE cleaning standards do not allow for any 'chemical' additive to be applied.
- The amount or volume of liquid that is generated depends on the size and square motage of the
 vessel that needs to be cleaned, and the condition of the underwater hall it self. A flow rate of 6
 gallons per minute and 40,000 PSL we will generate loss than 2,000 gallons per day during an 8hour ported.

бокрукся

Not applicable. This dry-dock has no scappers of any kind in its construction.

Blasting and Painting areas

- To the maximum extent possible, all blasting and painting activities must be sufficiently contained to prevent abravives, point chips and over soray from reaching receiving water. All sundblasters and primers shall be traced in proper techniques.
- As shown in Attachment 2, the vowels are usually at less 25 feet from the both ends of the dry dock and 50 feet-tall need wing walls on both sides of the dry dock serve naturally as containment to provent or minimize the discharge of spent abrasive, point chips and paint into the receiving water. Under windy conditions, any uncontained blasting and painting shall be prohibited; or plastic barriers or tarpaiding shall be having up to minimize the discharge of spent abrasives and paint chips.
- Preventive measure to be taken to prevent any sandblast pix point or other contaminants are to be strictly adhered to. Tarpanine will be placed at each end of the dry dock, draped across the width of the dry dock and to be secured/unchored at the bottom and sides. When necessary, and the scope of work require it, the use of 'shrink wrap' will be employed. The 'abrink wrap' will be placed around any structure that extends above the dry-dock wing walls or the conditions of the application of protective coatings may require the 'shrink wrap', (e.g. weather, removal or protective coatings from cost application).
- Spent sandblesting grit, removed morare growth and old hall points and debras will be swept to a
 "broom cleam" and "vaccounted" daily or as soon as the task is finished, or whichever is earlier
 and packed into nylon or steel container and removed away from the dry dock. Solids composite
 samples will be taken from the bags to determine the characteristics of the spent materials and then
 disposed accordingly.

- Before the dry-dock is lowered into the water, the entire dry dock will be cleaned and all 'hard to reach areas' (broomed swept and vacuumed) of all trash, abrasives and debris that could possibly contaminate the harbor.
- All amounts of sandhlass gra that are used or otherwise associated with each particular job will be measured and recorded on a dishy basis. The santiblest "boppers" will be measured measuredly and a calculation of the volume will determine the amount of sandhlast used per "topper". Each bag of spent sandblast got will be weighed to determine the amounts (pounds/tons) of recovered got were used. All measurements shall be recorded daily into the facility's Sandblast Grit Usage Log.
- Vacuatining of the dry-stock will be accomplished to remove murine growth, spent sandblest gut
 any removed marine protective costing and other dabris as soon as possible, after the task is
 complained and before the dry-dock is cycled. Vacuating and averaging will be done to access the
 hard to reach areas of the dry-dock, around the keel blocks and side-block tracks on the positions
 area.
- In the case of norm water, the above procedure shall keep the dry dock in a condition that the supporting will carry an communicate from the dock into the lambor.
- No lead-based paint will be applied on Mariaco Ltd. Dry dock. If possible, painting job shall be
 performed on land in contained painting booth. When necessary, containment shall be set up to
 prevent over spray and dripping. Spray during windy conditions or over open water is probiblised.

 Only quantities of paints necessary to complete the job will be allowed in the dry dock area.
- There shall always be absorbent and other cleanup items readily available to immediate clean up of spills. Should there be a paint spill, the area will be isolated and contained. The bulk of paint shall be accopsed back into containers, closed and removed from the dry dock. The remainder will be wiped with rage and the appropriate thinner or solvent. The residue will dry out on the steel dock.
- All spent thinxers and points will be accomplated in proper D.O.T. containers and disposed of according to Mariero, ltd. "Haz-Warre Management Plan"
- Mix paints and solvents in designated areas away from dry dock or near surface water. If possible, rate paints indeers or under a shed.
- An appropriate 'paint locker' will be placed on the dry-dock positions area to more all cans of new paints and thinness, also all empty paint containers will be accompilated and place in the 'paint locker' until ready for disposal.
- All empty cans to dry before disposal. Recycle paints, paint thinners and solvenia. Keep points
 from traffic areas to avoid apills.

Storage, Empty paints Containers/Waste

Storage of all empty paths containers will be kept in water tight 'paint lockers' to prevent any releases to dry -dock positions area and enter waters. This will be utilized at an area where all empty paint cans and drums committing 'waster' can be temporarily stored until they are ready for disposal, by the appropriate disposal contractor. Empty cans with residuals will be 'eir' dried or solidified and stored there until cans are properly disposed. Any can of paint or thinner that use not be recycled or used will be collected into the appropriate drum for finance disposal.

Engine repair areas

In order to prevent pollution to the dry drok are, most montenance activities shall be performed indoors in the machine shop. Draining of all equipment fluids will be accomplished prior to moving off site. Any draining/transferring of 'liquids' to done in the dry dock area will be

requirements and guidelines to prevent any oil, or other liquids from entering ownigable waters.

Equipment on dry-dock

- All equipment (man lifts, forkdifts, etc.) that o to be onlined will be pre-inspected to assure that it has no major leaks of any sort, (motor oil, hydraulic oil, fuel, etc.) Should say equipment develop any type of leak it will be assundicately put out of service and repaired, placed on some sort of contaminant to prevent any pollutants from entering hubbar waters, or taken out of dry-dock arms for repairs
- Should there be a release or leak of any oil or petroleum product, resulting from equipment that is utilized on the dry-dock postoon deck must be cleaned immediately.

Dry dock areas/Clean-up, Removal of Debrin and Sandblast Grif

- On the dry dock, all spent sandblasting unit, removed marine growth and old bull paints and determined to a "broom clean" and "vacuumed" daily or as soon as the task is finished, and packed into nylon container and removed away from the dry dock. Solids composite samples will be taken from the burn to determine the characteristics of the spent materials and then disposal accordingly.
- Before any vessel is unitocated, the entire dry dock will be swept and vacuumed cleaned of all trash, almoives and debris that could possibly contaminate the harbor. All side-block tracks and 'hard to reach'/'ridges' of postoon deck areas will be vacuumed to remove spent sandblast gris and other debris where sweeping is ineffective.
- All spent sandblast grit will be placed in "super sacks", all the "super sacks" will be placed on
 pulleta fach "sack" will have its "flaps" and to prevent any spent sandblast grit from below
 exposed to the elements. The "sacks" will be covered with visqueen/plastic sheathing. No
 employee shall place spent sandblast grit & debris on bern ground.
- All debris, u salt or other rubbinh, other then saudbles, gat) will be placed in roll off community, in
 he haded and disposed of by a waste hauler contracted by Marisco, lid.
- The "wing walls" of the dry dock will be swept or vacuumed, debris, loose rust or sandblast gris
 will be removed prior to my cycling evolution of the dry-dock. Any rust on the dry dock want
 wells will be one of are ongoing maintenance procedures, for the up-keeping of the dry-dock.

Employee training

Markee Ltd. his co-going training program year round to comply with local and Federal
regulations. All employees will have at least it hour training on hazardous waste management,
spill prevention and control in addition to their regular technical training on good housekeeping
sandblasting and painting, etc. Employees, independent contractors and customers shall be
informed about measures in EMPs Plan and will be required to perform in accordance with these
practices.

Impection and Record keeping

- Each dry dock lowering and lifting procedure, inspection, sampling detail and test result shall be properly logged in and kept in the Environmental Compliance Manager's office.
- Inspection: The dry dock operation and bound reping it constantly under the inspection and
 supervision of the Safety Officer and the appropriate train supervisors. The committee will do
 quarterly inspections to ensure all memoraneous of BMP's plan are well implemented and
 maintained. All required records shall be kept according to permit requirements.

- All logs encoming the sandblast grit used and recovered, their of ensteady forms, and employee training records and other documents will be properly traininged in the office of the Tenvironmental Compliance Manager.
- All records concerning NPDRS permit H10021786 will be kept for a minimum of (5) five years
 and be available for inspection by Federal and State of Hawali personnel.
- The dry-dock will be impected by the Environmental Compliance Manager, the Salesy Officer and all other wades, in course that all areas of concern are taken care of, (e.g. ofean up any oil stains, sweep up any small amount of spera sendblast grit left). Assure and prevent any potential pollutant scatter that might enter more harbor waters.

Monitoring

- The effluents shall be sampled and tested according to the permit requirement (See Attachment I) at each lifting and lowering cycle, and at least annually for storm water. Details can be found in Effluent Monitoring Program.
- Monthly Discharge Reports shall be sent to State Department of Health, Clean Water Branch and U. S. Bavironmental Protection Agency, Water Management Division by the 28th of each month.

Spill Clean up

- In the even of any spill from work being conducted on the dry dock by trades, (pipe fines, mechanics or painters) or the type of liquids that are spilled, (hydrantic call, first, paints or thereers) immediate action will be taken.
- The tollowing protocol will be implemented and closely adhered to for any type of spill that
 notion on the dry dock area (see Attachment 3)

Land Based Operations

- All locations around the dry-dock land operations will adhere to the BMP Issues stated. Mariaco will take all necessary precautions such as providing containment of firel when left on-sight, tand blast grit new or spent will be covered. Spill pallets will be on-sight and used, spill kits will be located on the dry-dock as well as the lead based operations and were there is a possibility of a spill occurring.
- Should there be any spill on the ground surface, it will be contained immediately, reported to
 proper authorities, if it is a reportable quantity, and cleaned. Dirt or ground soil will be removed,
 (shoveled) until there is no visible trace of product. The removed product will be placed in the
 appropriate D.O.T. container and disposed in accordance with all local, state and federal
 regulations.

Chapter 2. Site location and general Environment

The NPDES permit (No. EI 0021786) covers the land area and dry dook area in Manusco Ltd. We hereby provide some general information about this area that is considered valuable to the public.

I. The General nature of Pacility Activity.

The primary task Marison Ltd. performs is slap repair and maintenance. The dry dock is cycled through a lowering and lifting procedure to accommodate ship repairs below waterline. The general repair or maintenance job involves tank eleming sandblasting painting welding and other mechanic work.

IL Map of the facility tayont and general Environment

Attachment 2 Shows the facility, the layout of the area immediately surrounding it, and the general plan for the dry-dock.

The facility is located at the Northeast quadrant of the Harbor,

The receiving water is from Burber a Point Harbor through its Outfall Serial No. 001 through 006, at coordinates: Latitude J1*10'00"N: Langitude 157*12'00"W.

Ontfall Description:

Lowering 001 Lifting 002

Storm water Ranoff from dry-dock area 003, 004

Storm water Runoff from land based operations: 005, 006

Non-Contact Cooling Westr Discharge 007, 008, 009, 010

Chapter 3. Description of potential sources of pollution

(Attachment 2) Shows the dry-dock layout. Site activities such as sandblasting, pointing and mechanical repairs mostly happen between the two wing walls.

No liquids or materials are stored on the dry dock tree. Only the amount of paints or abreatyes required for daily job is transferred into the dry dock. Therefore, potential pollution sources are mainly from sandblasting and painting. The following worksheet lists various activities and materials involved in the operation which could potentially become contamounts.

Table 1. List of pollutants with a reasonable potential to be personn in efficient in significant quantities

· Surface preparation:

Process involves low-pressure water cleaning, nitra high surface water blasting and saudblasting. Any residual waste consists of spent saudblast grit with pairs claps and wastewater generated during lowpressure water cleaning and marine growth.

· Painting:

Process involves the application of Marine coatings to the enterior of ship halls after sandblasting or the removal of marine growth. Residual waste will consist of empty paint containers, paints, thinners and marking material.

Metal plating and surface finishing:

Marisco, lid. does not provide these types of services or conduct this type of operation.

Machining and Metal working:

All machining and metalworking is performed induors in our machine shop. The only exception is on occasions when shall housings must be bored in place. In those cases cotting, grinding and boring must be accomplished. Area of work will have containment around and under. Waste generated will consist of degreesers and mating oils.

· Solvent cleaning and degressing:

Process involves utilizing water based, 'environmentally safe' solvents that contain low or no chlorinated solvents. Residual waste such as solvents, rags and containers are the only waste generated.

· Storage areas:

Materials such as motor oil hydraulic oil and paints are stored titles in the waterouse or in paint lockers/material containers in the dry-dock or the land based areas.

Dry-dock maintenauce:

This involves the general up-keep of our dry-dock, with the majority of the maintenance being performed with in the dry-dock wing swalls of the dry-dock.

Operation of forldifts, manifits and other equipment:

Depending on the scope of repairs that are associated with a vessel in dry dock, the operation of equipment is essential and needed at times to accomplish the repairs. The above types of equipment are potential sources of pollutants.

Table 2. List of pollutants with a reasonable potential to be present in efficient in significant quantities

Zinc Oil
Lead Grease
Copper Hydraulic Fluids
Arsenic Diesel Fuel
Catherine Gasoline

Morracy Tm Solida

Exhibit 3 Marisco, Ltd. Main Facility Days of Unpermitted Stormwater Discharge

Month and Year	No, of Days of Rain => 0.1 inch
Nov 2007	4
Dec 2007	7
Jan 2008	1
Feb 2008	3
Mar 2008	2
Apr 2008	2
May 2008	3
Jun 2008	1
Jul 2008	2
Aug 2008	2
Sep.2008	2
Oct 2008	2